


Data Sheet MTH/620

Type MTH/620

Product Reference	S.W.L.(kN)**	Width (W)	Height (H)	Box Qty.
MTH/620/38	28.25	38mm	291mm	25
MTH/620/44	28.25	44mm	288mm	25
MTH/620/50	29.03	50mm	285mm	25
MTH/620/63	26.09	63mm	278mm	25
MTH/620/75	23.38	75mm	272mm	25
MTH/620/88	23.38	88mm	266mm	25
MTH/620/100	22.42	100mm	260mm	25
MTH/620/125	21.46	125mm	247mm	25
MTH/620/150	20.50	150mm	235mm	25

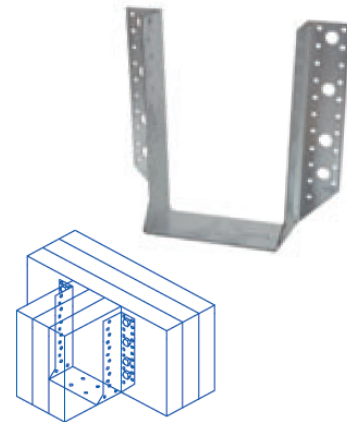

For use in heavy duty applications such as multiple truss units, main trimmer joists, purlin to beam connections or similar situations where unusually heavy loads occur. Manufactured from 2mm thick galvanised steel. Bolt hole to suit M12 fixing, nail holes 5mm diameter.

Produced from galvanised steel to BS EN 10346:2009 + G275 as standard. Use 30 x 3.75mm sheradised square twisted nails in all pre-punched holes, together with bolts in Multi Truss Hanger range where required. Stainless steel hangers are available to order. Bearing surface on all multi-truss hangers is 75mm.

