


G3ARSB Galvanised Dry Wall Stop Bead

Data sheet

Issue Date:
March 2026

Drylining Beads

Drylining beads provide the plasterer with the ability to produce true straight edges in drylining applications and give an excellent key for thin coat (skim) plastering. Fixing of all the products is simple and the beads give good resistance to cracking, chipping and impact damage on corners and edges.

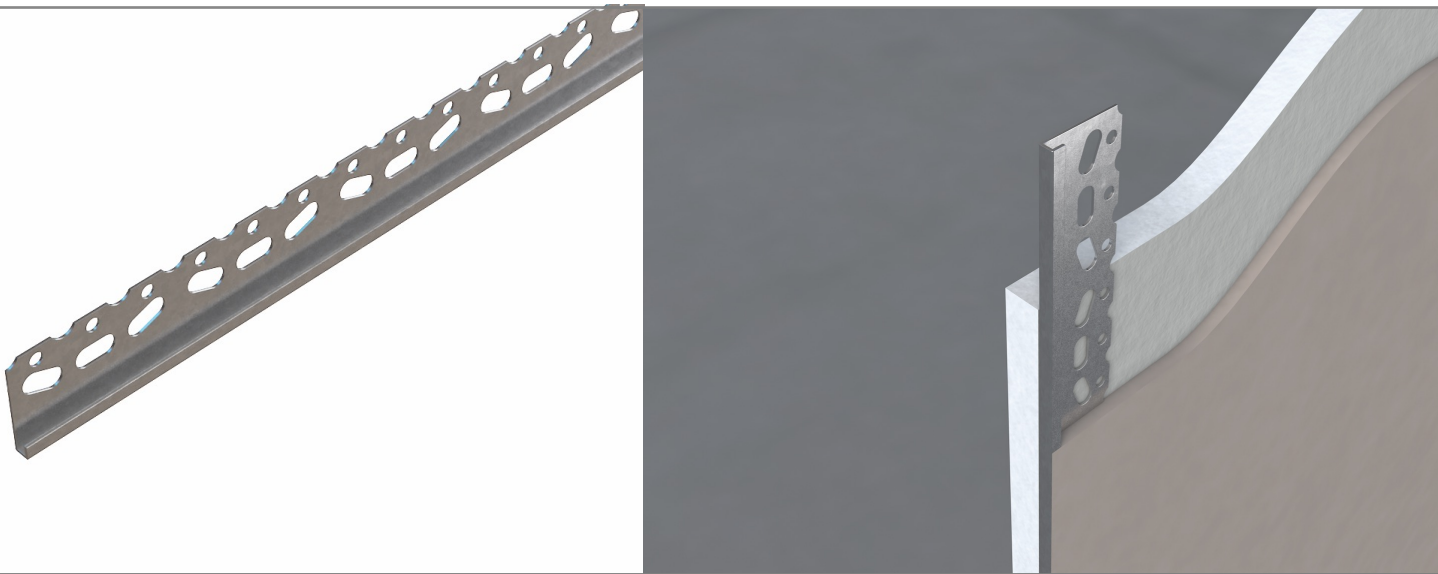

G3ARSB Galvanised Dry Wall Stop Bead

A bead for protection of thin coat plaster at edges and reveals and for abutment of thin coat plaster against other wall finishes. Also sometimes used as an arch forming bead. Nail holes for easy fix with drywall nails. Plaster dabs or suitable adhesive at maximum 600mm centres can also be used for installation. Rigid but light bead with a 25mm perforated wing for an excellent thin coat plaster key. Available as either a 3mm or 6mm stop. Internal use only. Beads can be cut to size as required using tin-snips and/or a hacksaw. The perforated metal wing provides a suitable key to prevent cracking. Avoid damage to bead and coating when trowelling.

Standard:	BS EN14353:2007+A1:2010
Material:	Galvanised mild steel DX51D+Z275 (275g/m ² Zinc coating)
Material gauge:	0.4mm
Reaction to fire:	Class A1

Code	Size	Per Box	Weight
G3ARSB24	2.4m x 3mm	50 lengths	11kgs
G3ARSB30	3.0m x 3mm	50 lengths	14kgs
G6ARSB24	2.4m x 6mm	50 lengths	13.5kgs
G6ARSB30	3.0m x 6mm	50 lengths	17kgs

Goods to be stored and transported laying down and in dry conditions.
Please dispose or recycle in accordance with waste management regulations.

COSHH & Health & Safety.

Contains no substances hazardous to health. The comparative rough surface finish and sharp edges of expanded metal requires care when handling manually, to avoid risk of cuts and abrasions gloves should be worn.