


GARB Galvanised Architrave Bead

Data sheet

Issue Date:
March 2026

Plaster and Render Beads

Beads that are designed to give true corners and edges to plaster and render where thick or 'rough' coats are required. Fixing is easy using plaster dabs or galvanised nails (with galvanised beads) and the mesh wings provide resistance to cracking while offering a good key to the plaster or render.

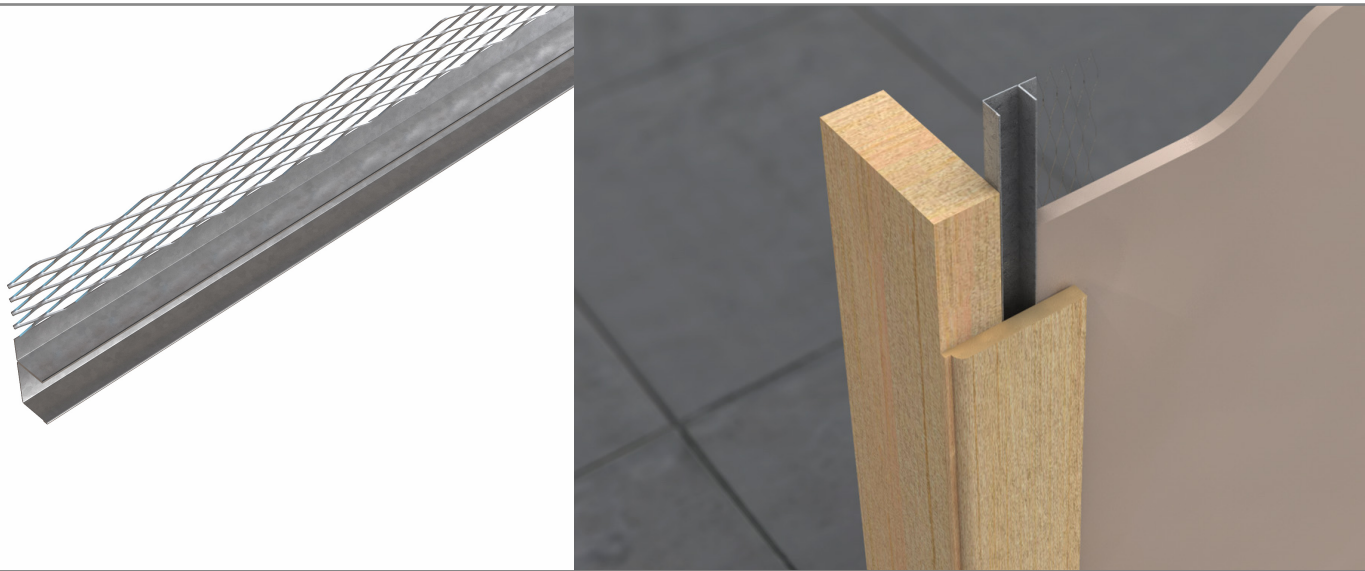

GARB Galvanised Architrave Bead

A range of beads produced to allow for decorative finishes i.e. shadow lines and recesses around door and window frames etc. The bead can either be supplied as an engaging bead or abutting bead with various plaster depths available. Internal use only. Beads can be cut to size as required using tin-snips and/or a hacksaw. The large diamond of the expanded metal wings provide a suitable key to prevent cracking. Avoid damage to bead and coating when trowelling.

Standard: BS EN13658-1:2005

Material: Galvanised mild steel DX51D+Z275 (275g/m² zinc coating)

Material gauge: 0.4mm

Reaction to fire: Class A1

| Code | Size | Per Box | Weight |
|-------------------|---------------------------------------|------------|----------|
| G10EABF30ENGAGING | 3.0m x 10mm engaging (without flange) | 50 lengths | 24.75kgs |
| G13EABF30ENGAGING | 3.0m x 13mm engaging (without flange) | 50 lengths | 24.75kgs |
| G10EABF30ABUTTING | 3.0m x 10mm abutting (with flange) | 50 lengths | 24.75kgs |
| G13EABF30ABUTTING | 3.0m x 13mm abutting (with flange) | 50 lengths | 24.75kgs |
| G25EABF30ABUTTING | 3.0m x 20mm abutting (with flange) | 25 lengths | 18.5kgs |

Goods to be stored and transported laying down and in dry conditions.

Please dispose or recycle in accordance with waste management regulations.

COSHH & Health & Safety.

Contains no substances hazardous to health. The comparative rough surface finish and sharp edges of expanded metal requires care when handling manually, to avoid risk of cuts and abrasions gloves should be worn.