



GEB Galvanised Plasterboard Edge Bead

Data sheet

Issue Date:
March 2026

Drylining Beads

Drylining beads provide the plasterer with the ability to produce true straight edges in drylining applications and give an excellent key for thin coat (skim) plastering. Fixing of all the products is simple and the beads give good resistance to cracking, chipping and impact damage on corners and edges.

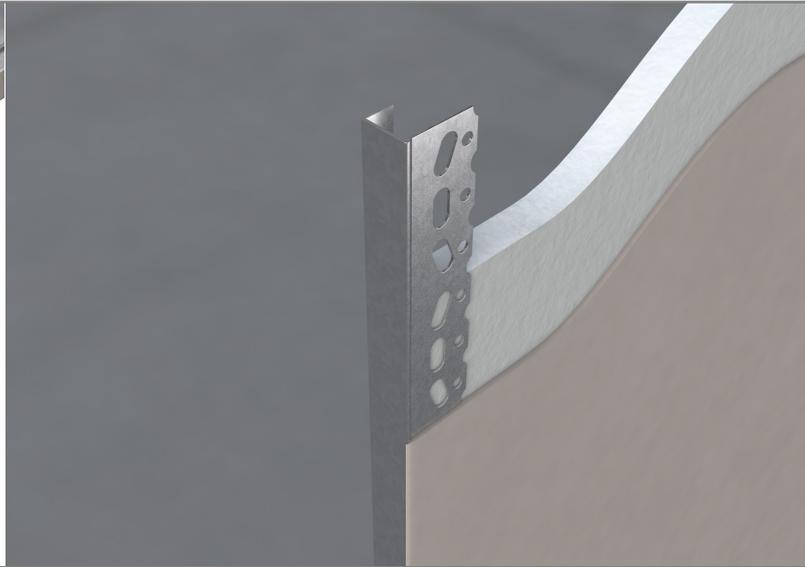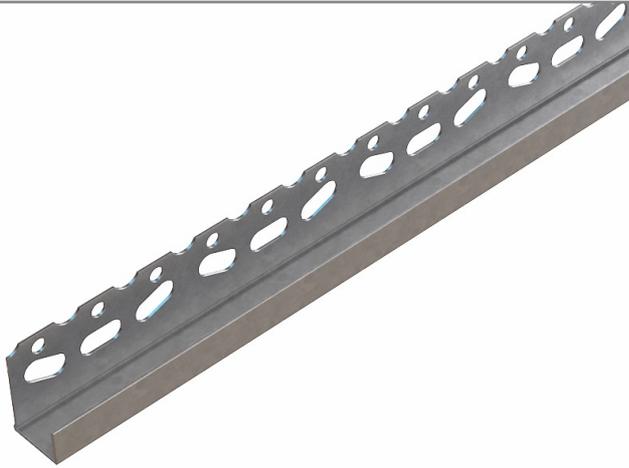

GEB Galvanised Plasterboard Edge Bead

A bead to reinforce the edges of plasterboard which can be fixed either with the 25mm perforated flange on the face of the board by nailing and skimmed over or with the short flange on the board face for a decorative edge finish. Internal use only. Available as 3 different depths to suit different plasterboard thicknesses.

Beads can be cut to size as required using tin-snips and/or a hacksaw. The perforated metal wing provides a suitable key to prevent cracking. Avoid damage to bead and coating when trowelling.

Standard:	BS EN14353:2007+A1:2010
Material:	Galvanised mild steel DX51D+Z275 (275g/m ² Zinc coating)
Material gauge:	0.4mm
Reaction to fire:	Class A1

Code	Size	Per Box	Weight
GEB9530	3.0m x 9.5mm	50 lengths	23kgs
GEB12530	3.0m x 12.5mm	50 lengths	23kgs
GEB1530	3.0m x 15mm	50 lengths	23kgs

Goods to be stored and transported laying down and in dry conditions.
Please dispose or recycle in accordance with waste management regulations.

COSHH & Health & Safety.

Contains no substances hazardous to health. The comparative rough surface finish and sharp edges of expanded metal requires care when handling manually, to avoid risk of cuts and abrasions gloves should be worn.