


# GERSB Galvanised External Render Stop (Bell) Bead

Data sheet

Issue Date:  
March 2026

## Plaster and Render Beads

Beads that are designed to give true corners and edges to plaster and render where thick or 'rough' coats are required. Fixing is easy using plaster dabs or galvanised nails (with galvanised beads) and the mesh wings provide resistance to cracking while offering a good key to the plaster or render.

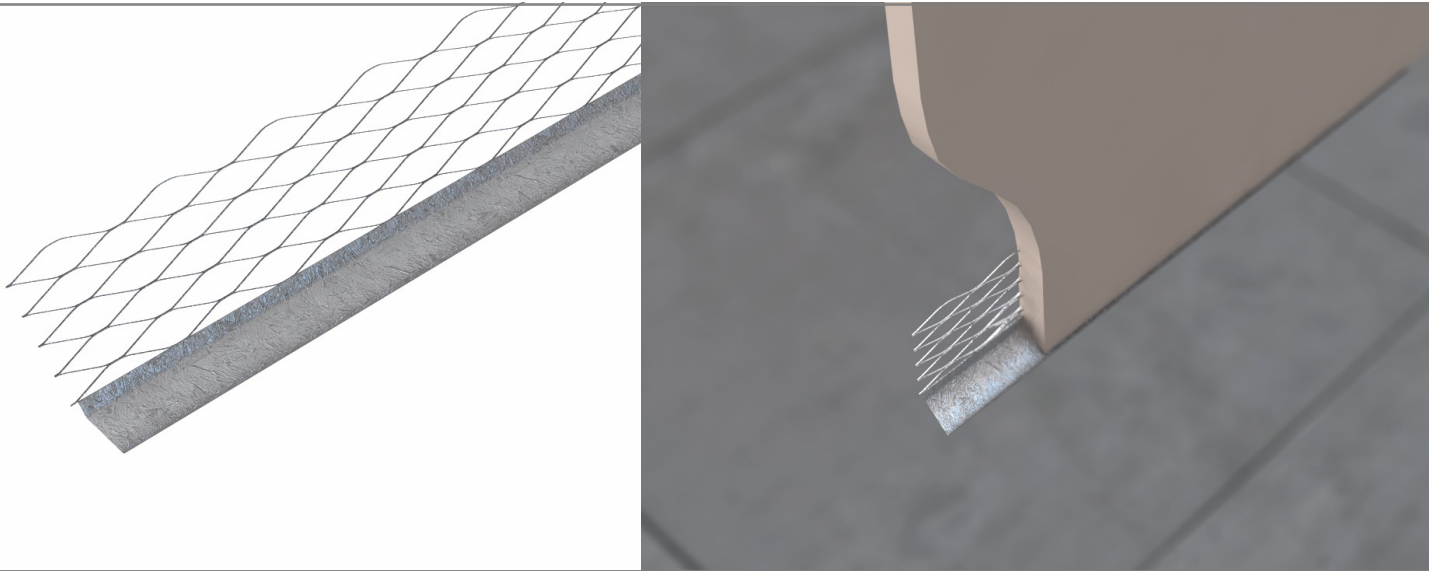

## GERSB Galvanised External Render Stop (Bell) Bead

Used where a neat drip or bell-shaped edge is needed on external render to shed rainwater at base of a wall and to protect render edge from damage. The 53mm mesh wings allow for a good render key and resistance to cracking. Fixed by plaster or mortar dabs, grab adhesive or galvanised nails/screws with washer at maximum 600mm centres. Although this is for external use, we would generally recommend stainless or PVC-u for this application in the UK only using this product in sheltered or low rainfall areas. Beads can be cut to size as required using tin-snips and/or a hacksaw. The large diamond of the expanded metal wings provide a suitable key to prevent cracking. Avoid damage to bead and coating when trowelling.

<b>Standard:</b>	BS EN13658-2:2005
<b>Material:</b>	Galvanised mild steel DX51D+Z275 (275g/m <sup>2</sup> zinc coating)
<b>Material gauge:</b>	0.4mm
<b>Reaction to fire:</b>	Class A1

Code	Size	Per Box	Weight
GERSB24	2.4m x 22mm	50 lengths	19kgs
GERSB16	3.0m x 16mm	50 lengths	21kgs
GERSB30	3.0m x 22mm	50 lengths	23kgs

Goods to be stored and transported laying down and in dry conditions.  
Please dispose or recycle in accordance with waste management regulations.

### COSHH & Health & Safety.

Contains no substances hazardous to health. The comparative rough surface finish and sharp edges of expanded metal requires care when handling manually, to avoid risk of cuts and abrasions gloves should be worn.