


GMMB Galvanised Mini Mesh Bead

Data sheet

Issue Date:
March 2026

Drylining Beads

Drylining beads provide the plasterer with the ability to produce true straight edges in drylining applications and give an excellent key for thin coat (skim) plastering. Fixing of all the products is simple and the beads give good resistance to cracking, chipping and impact damage on corners and edges.

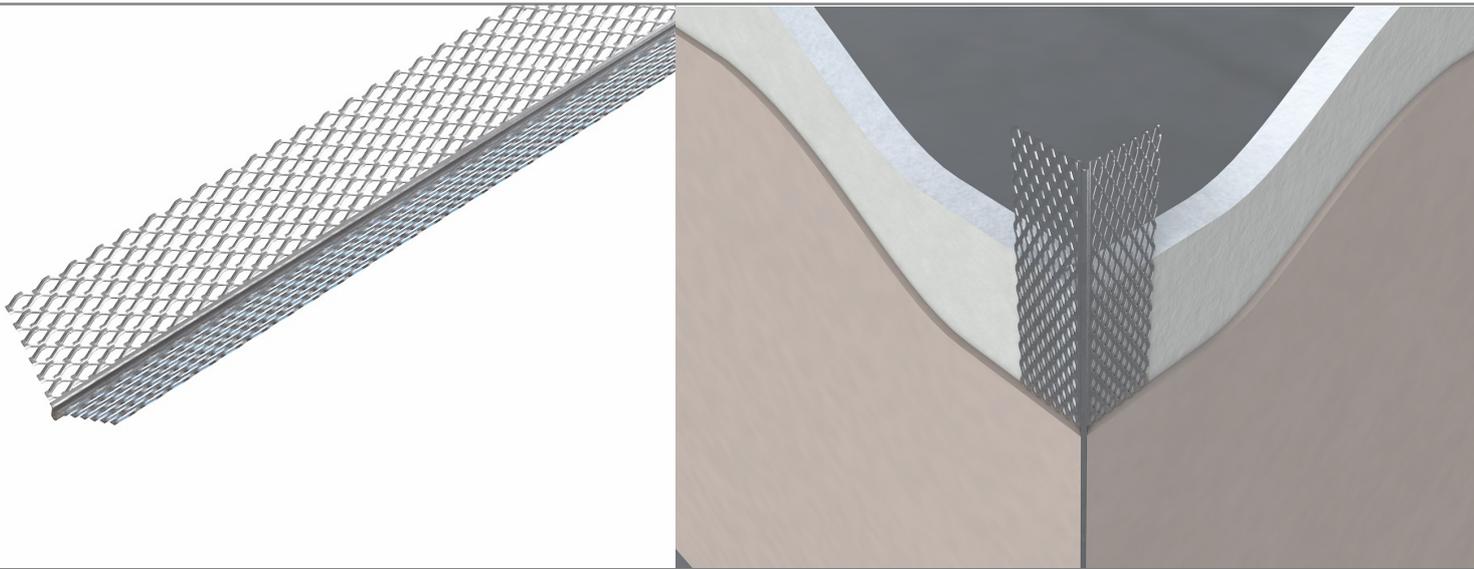

GMMB Galvanised Mini Mesh Bead

A thin coat bead with fine mesh wings designed for one coat plastering. Plaster depth 3mm. Fix with galvanised nails, plaster dabs or suitable adhesive at maximum 600mm intervals. Use on plasterboard lined walls or aerated blocks. Internal use only.

Beads can be cut to size as required using tin-snips and/or a hacksaw. The expanded metal wings provide a suitable key to prevent cracking. Avoid damage to bead and coating when trowelling.

Standard:	BS EN14353:2007+A1:2010
Material:	Galvanised mild steel DX51D+Z275 (275g/m ² Zinc coating)
Material gauge:	0.4mm
Reaction to fire:	Class A1

Code	Size	Per Box	Weight
GMMB24	2.4m x 28mm wing	50 lengths	12kgs
GMMB27	2.7m x 28mm wing	50 lengths	13.5kgs
GMMB30	3.0m x 28mm wing	50 lengths	15kgs

Goods to be stored and transported laying down and in dry conditions.
Please dispose or recycle in accordance with waste management regulations.

COSHH & Health & Safety.

Contains no substances hazardous to health. The comparative rough surface finish and sharp edges of expanded metal requires care when handling manually, to avoid risk of cuts and abrasions gloves should be worn.