


## Drylining Beads

Drylining beads provide the plasterer with the ability to produce true straight edges in drylining applications and give an excellent key for thin coat (skim) plastering. Fixing of all the products is simple and the beads give good resistance to cracking, chipping and impact damage on corners and edges.

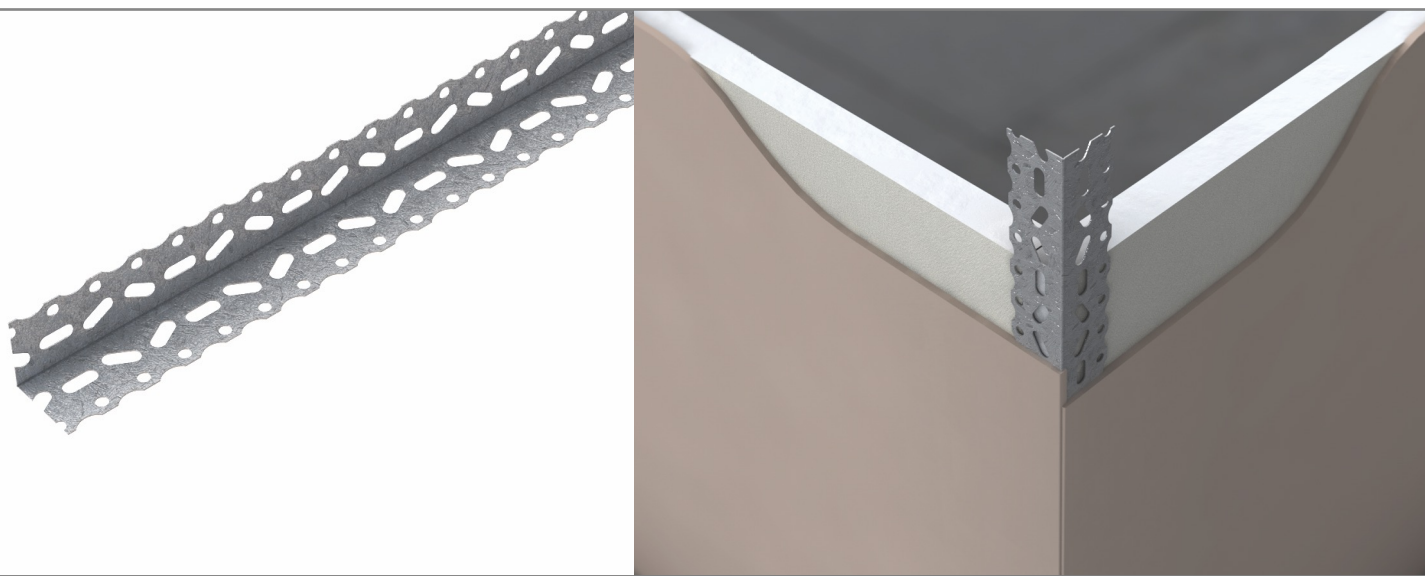

## GPPTCB Galvanised Premier Perforated Thin Coat Bead Wide Wing

A wider-wing thin coat board bead for plaster skimming on plasterboard lined walls or overskim of existing plastered walls. Plaster depth 2/3mm. Nail holes for easy fix with drywall nails. The bead can alternatively be installed using a suitable adhesive or plaster dabs at maximum 600mm intervals. Scalloped edge for an excellent plaster key. Internal use only.

Beads can be cut to size as required using tin-snips and/or a hacksaw. The wider perforated wings provide an improved coverage over a standard wing and increase the key to prevent cracking. Avoid damage to bead and coating when trowelling.

<b>Standard:</b>	BS EN14353:2007+A1:2010
<b>Material:</b>	Galvanised mild steel DX51D+Z275 (275g/m <sup>2</sup> Zinc coating)
<b>Material gauge:</b>	0.4mm
<b>Reaction to fire:</b>	Class A1

Code	Size	Per Box	Weight
GPPTCB24	2.4m x 25mm wing	50 lengths	15kgs
GPPTCB27	2.7m x 25mm wing	50 lengths	16.5kgs
GPPTCB30	3.0m x 25mm wing	50 lengths	18kgs

Goods to be stored and transported laying down and in dry conditions.  
Please dispose or recycle in accordance with waste management regulations.

### COSHH & Health & Safety.

Contains no substances hazardous to health. The comparative rough surface finish and sharp edges of expanded metal requires care when handling manually, to avoid risk of cuts and abrasions gloves should be worn.