



GRL Galvanised Riblath

Data sheet

Issue Date:
March 2026

Lathing Products

Lathing products are used as a back-ground key and as an anti-crack measure for internal plaster and external render work and can be fixed to brick / block work, timber, steel and concrete when using the appropriate fixing. The lath enables a smooth even finish where required.

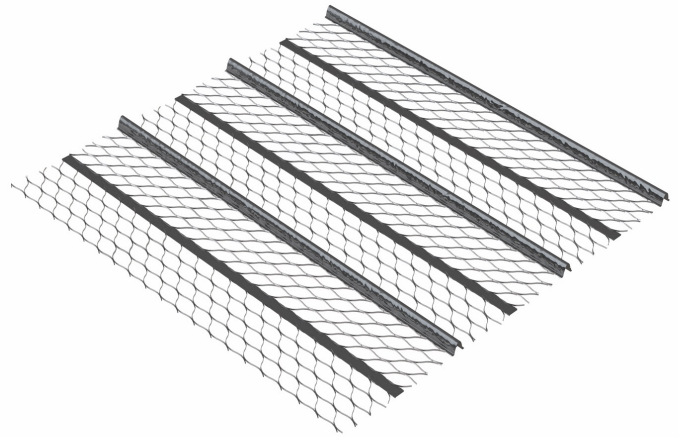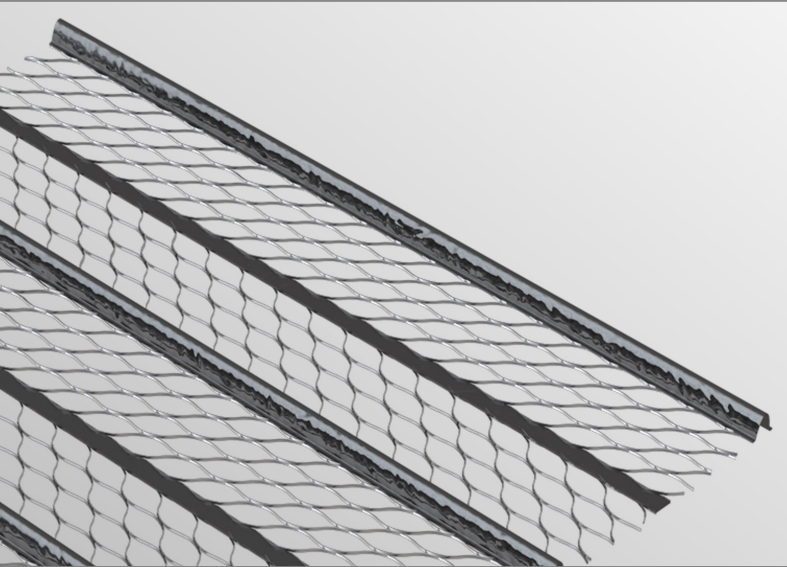

GRL Galvanised Riblath

A mesh lath sheet with improved strength over diamond lath with stiffening V profiled ribs. Used as a plaster carrier/back-ground key and to increase reinforcement & improve anti-crack measures on walls and suspended ceilings. This versatile, easily formed product can also be used to encase steel columns and beams to assist in fire protection. To be used internally, fixed with large head galvanised nails, galvanised screw and plug, staples or tying wire.

Sheets can be cut to size as required using tinsnips. (Full installation details can be requested separately).

Standard:	BS EN 13658-1:2005
Material:	Galvanised mild steel DX51D+Z275 (275g/m ² zinc coating)
Material gauge:	0.4mm
Reaction to fire:	Class A1

Code	Size	Per Bundle	Weight
GRL	2500 x 600 x 0.4mm (8mm rib depth)	10 sheets	22kg (1.5 kg/m ²)

Goods to be stored and transported laying down and in dry conditions.
Please dispose or recycle in accordance with waste management regulations.

COSHH & Health & Safety.

Contains no substances hazardous to health. The comparative rough surface finish and sharp edges of expanded metal requires care when handling manually, to avoid risk of cuts and abrasions gloves should be worn.