


External beads

The following beads are generally for use with external renders or areas where there is high moisture / humidity or where applying a polymer modified or sand / cement finish. The mesh wings provide an excellent mortar key and the solid edges create true straight arrises, corners and finishes to render runs. Fixing is generally by mortar dabs or stainless steel nails or staples. Galvanised fixings should not be used to avoid bi-metallic reactions which cause rust spots.

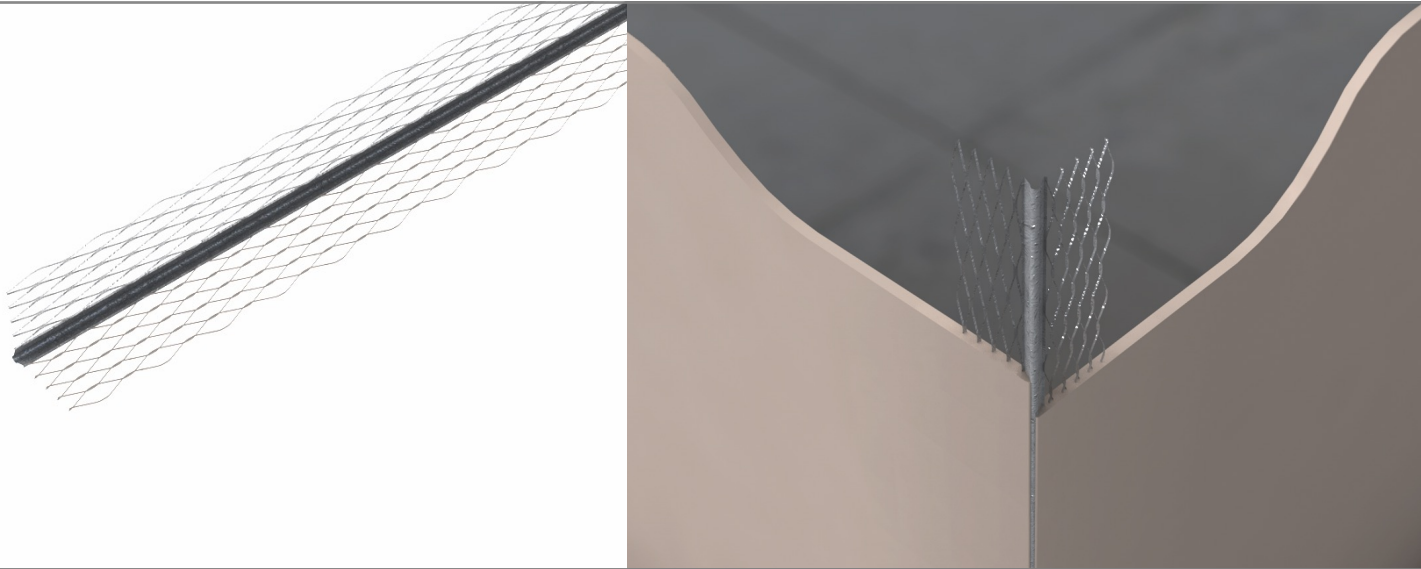

SSAB Stainless Steel Angle Bead, Mesh Wing

A traditional render corner bead which provides a strong true corner or arris to protect the render edge, with the mesh wings allowing for a good render key and resistance to cracking. Fixed by mortar dabs, grab adhesive or stainless steel nails/screws with washer at maximum 600mm centres. Push the wing in further to the background to achieve the desired plaster depth 10-13mm then ensure the nose is set square and plumb as required. External use only. The wider wing version is more suitable for depths 16-20mm or areas where the background is more uneven. Beads can be cut to size as required using tin-snips and/or a hacksaw.

Standard: BS EN13658-2:2005
Material: Stainless steel grade 1.4016
Material gauge: 0.4mm
Reaction to fire: Class A1

Code	Size	Per Box	Weight
SSAB30	3.0m x 50mm wing	50 lengths	17kgs
SSJAB30	3.0m x 60mm wing	50 lengths	23kgs

Goods to be stored and transported laying down and in dry conditions.
Please dispose or recycle in accordance with waste management regulations.

COSHH & Health & Safety.

Contains no substances hazardous to health. The comparative rough surface finish and sharp edges of expanded metal requires care when handling manually, to avoid risk of cuts and abrasions gloves should be worn.