


SSPSB Stainless Steel Plaster Stop Bead

Data sheet

Issue Date:
March 2026

External Beads

The following beads are generally for use with external renders or areas where there is high moisture / humidity or where applying a polymer modified or sand / cement finish. The mesh wings provide an excellent mortar key and the solid edges create true straight arrises, corners and finishes to render runs. Fixing is generally by mortar dabs or stainless steel nails or staples. Galvanised fixings should not be used to avoid bi-metallic reactions which cause rust spots

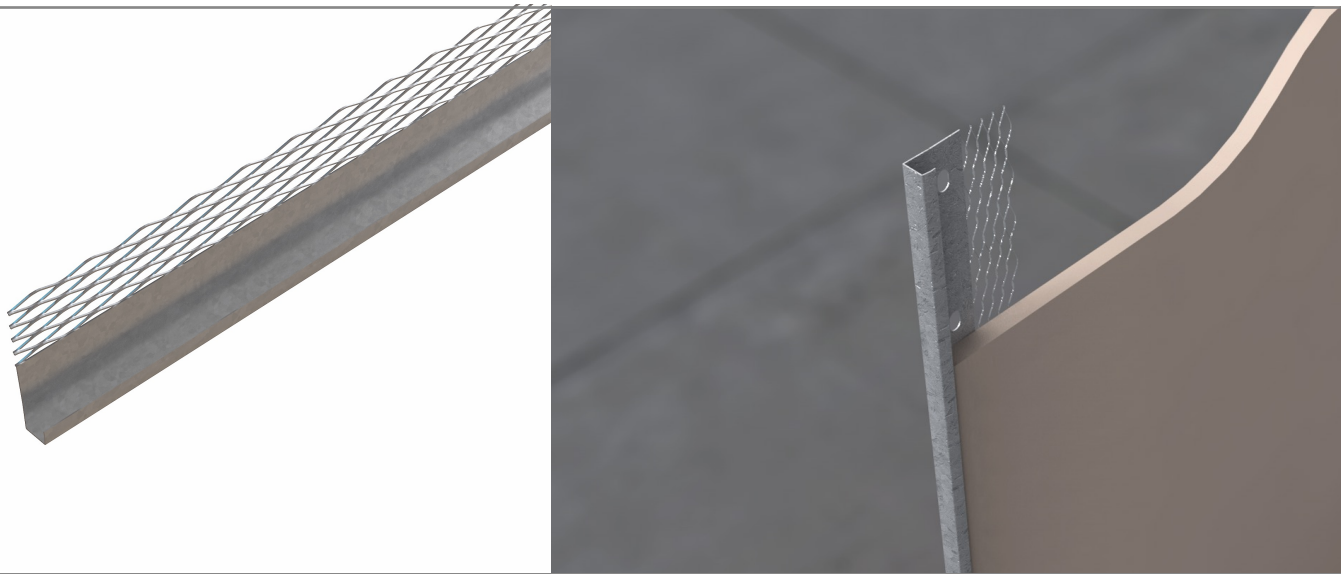

SSPSB Stainless Steel Plaster Stop Bead

Provides a straight and clean edge to render where it butts up to other materials such as door and window frames and protects the render edge from damage. The 53mm mesh wings allow for a good render key and resistance to cracking. Fixed by mortar dabs, grab adhesive or stainless nails/screws with washer at maximum 600mm centres. Available in 4 different depths to suit different applications and conditions. External use only. Beads can be cut to size as required using tin-snips and/or a hacksaw. The large diamond of the expanded metal wings provide a suitable key to prevent cracking.

Standard: BS EN13658-2:2005
Material: Stainless steel grade 1.4016
Material gauge: 0.4mm
Reaction to fire: Class A1

Code	Size	Per Box	Weight
SS10PSB30	3.0m x 10mm	50 lengths	17kgs
SS13PSB30	3.0m x 13mm	50 lengths	18kgs
SS16PSB30	3.0m x 16mm	50 lengths	20kgs
SS19PSB30	3.0m x 19mm	50 lengths	21kgs

Goods to be stored and transported laying down and in dry conditions.
Please dispose or recycle in accordance with waste management regulations.

COSHH & Health & Safety.

Contains no substances hazardous to health. The comparative rough surface finish and sharp edges of expanded metal requires care when handling manually, to avoid risk of cuts and abrasions gloves should be worn.