


TLPERS External Render Stop (Bell) Bead

Data sheet

Issue Date:
March 2026

PVC-u Beads

PVC-u beads are now being used more and more, particularly in areas of high rainfall or extreme damp conditions. They provide an economical alternative to stainless steel products and are used in the same way as normal galvanised or stainless steel beads. They are manufactured from white high density polyvinylchloride high impact window grade material. Other colours are available and manufactured to order. The face of the bead is ribbed and perforated to produce a good plaster or mortar key and can be easily cut to size using a hacksaw.

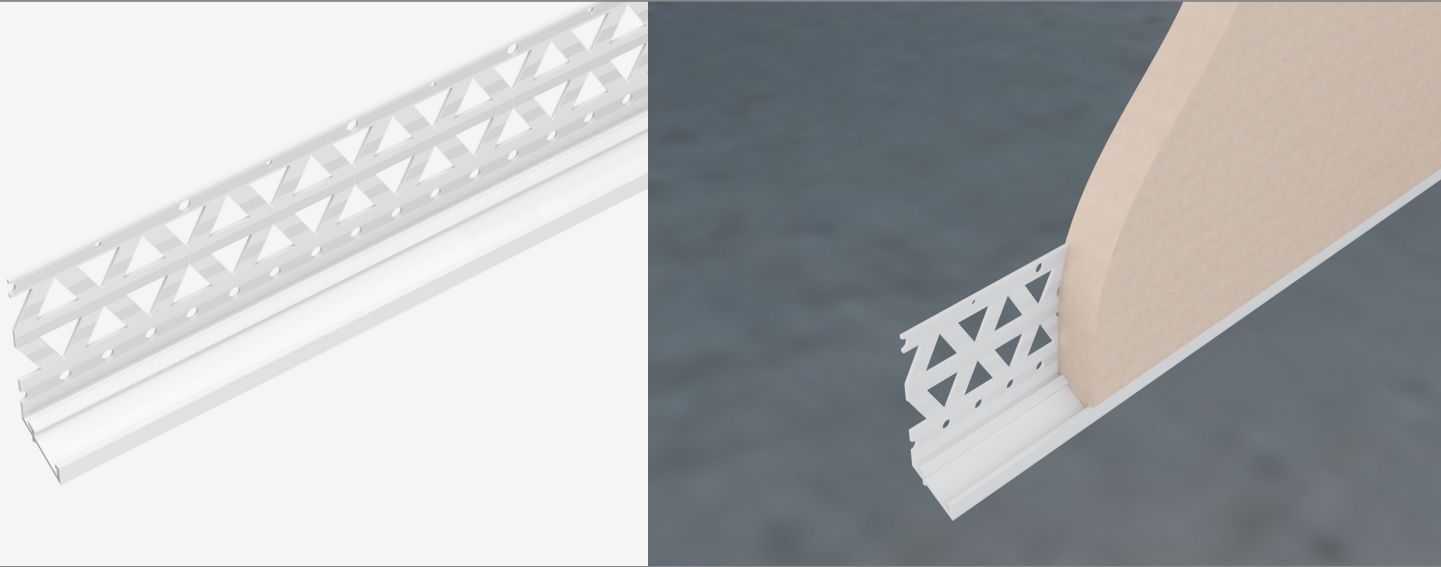

TLPERS External Render Stop (Bell) Bead

For use with external render to provide a drip feature at the bottom of the render coat. Fixed using either mortar dabs or masonry nails the bead forms a straight edge to the bottom of the render.

Benefits

- Simple installation (with plaster dabs or appropriate fixings)
- Cost effective
- Easy to cut (by use of tin snips or fine tooth saw)
- Non corrosive

Standard: Meets the equivalent standards required for metal bead to BS EN 13658-2:2005

Material: Exterior grade impact resistant UV stable unplasticized PVC-u

Code	Size	Per Box	Weight
TLPERS625	2.5m x 6mm render depth x 42mm wing	25 lengths	7kgs
TLPERS1025	2.5m x 10mm render depth x 42mm wing	25 lengths	8kgs
TLPERS1525	2.5m x 15mm render depth x 42mm wing	25 lengths	9kgs
TLPERS2025	2.5m x 20mm render depth x 42mm wing	25 lengths	11kgs

Goods to be stored and transported laying down and in dry conditions.

Please dispose or recycle in accordance with waste management regulations.

COSHH & Health & Safety.

Contains no substances hazardous to health. The comparative rough surface finish and sharp edges requires care when handling manually, to avoid risk of cuts and abrasions gloves should be worn.