


Premium Bead and Mesh



Our Commitment to You

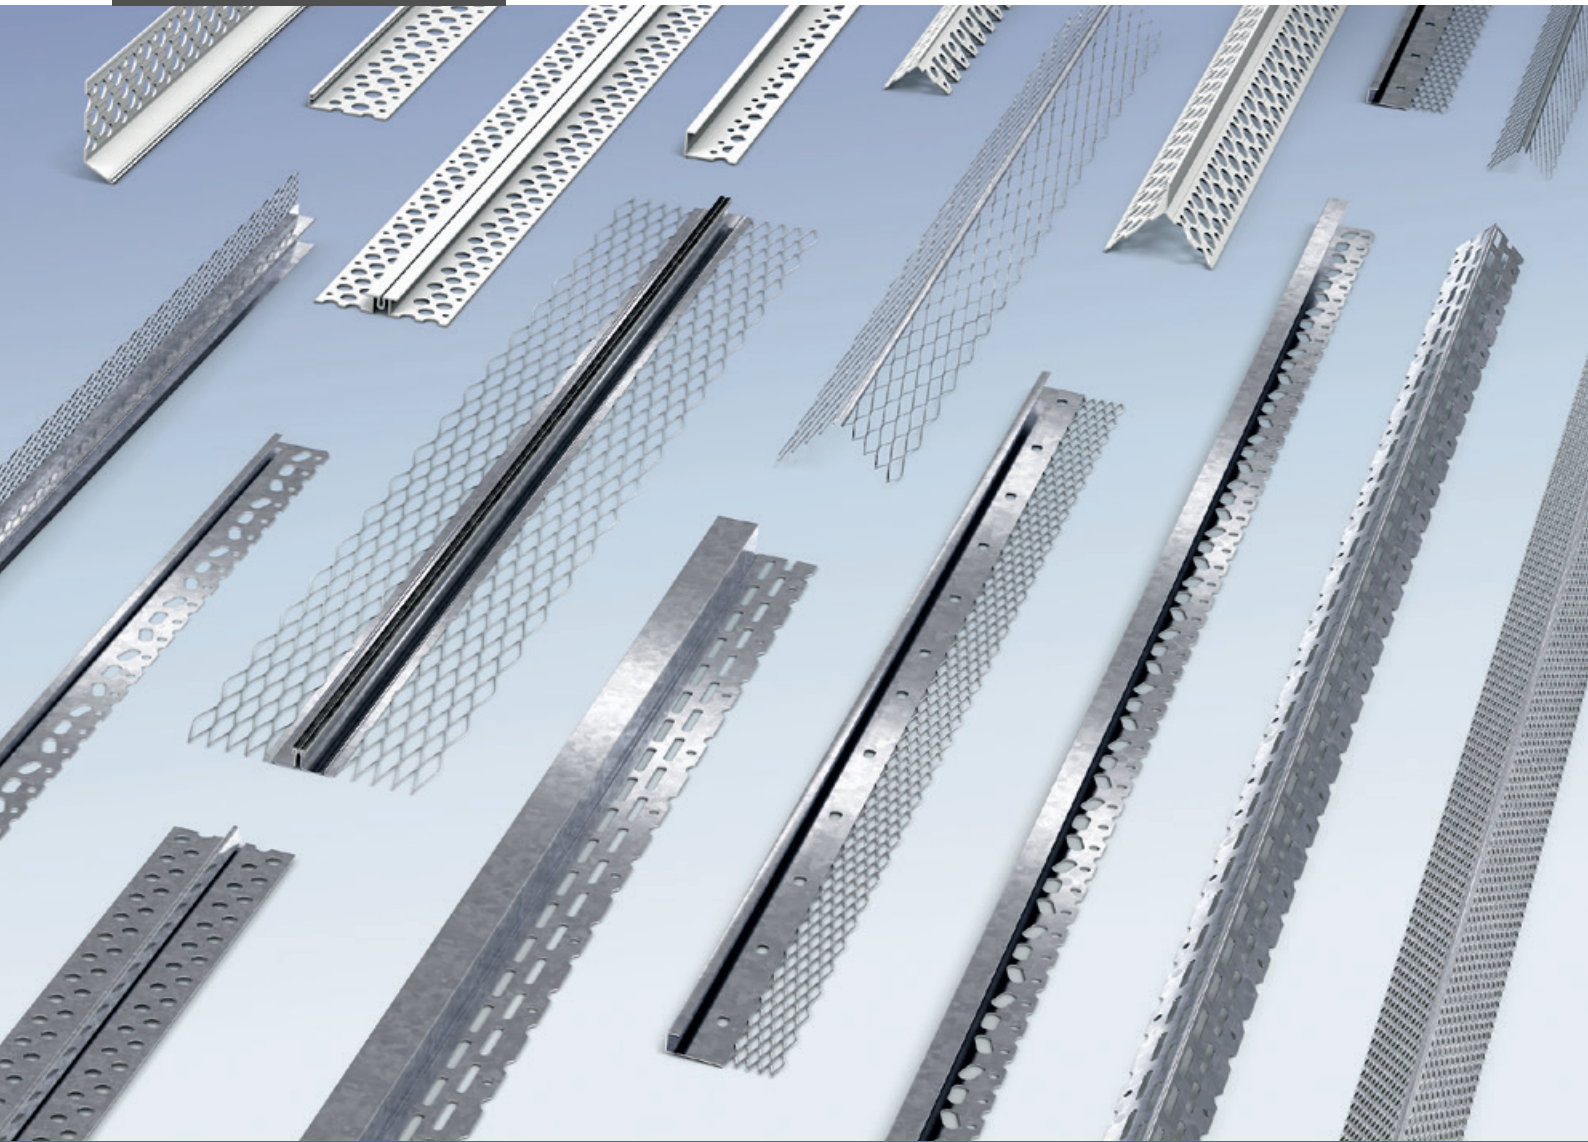

Proven Products

Our range of high-quality products are engineered to meet the demanding specifications of today's construction industry. For over 25 years, we've been exploring new manufacturing methods and improving existing ones to provide a superior product to our customers and meet their needs more effectively. And by investing in staff, machinery and premises at our 6 UK sites, we're able to increase efficiency and drive down costs while maintaining the highest possible standards.

Our ISO 9001 certification is your guarantee of quality in our manufacturing process, from the high grade steel that enters our factory to the high performance finished products – many of them carrying BBA approval – that leave it. So you can always depend on Vista for reliable, proven products.



Reliable Service

As crucial as the support we provide for important construction projects is the support we offer our customers. Strong, supportive relationships have always been at the heart of our business. It's how we develop a clear understanding of what our customers need and how we work closely with them to deliver their requirements. Our friendly, knowledgeable Customer Service Team are there to deal with your enquiries and make sure you get the products you want, when and where you need them. It's because they go the extra mile that some customers have been with us from day one.

With a large stock-holding facility and a rapid, reliable delivery network, we can provide mixed loads of products wherever they're needed at a moment's notice. We also provide a full technical design service for products such as windposts and masonry support where it's required.



Competitive Prices

Being more efficient in our approach to product design, manufacturing, service, packaging and distribution means we can be more competitive with our prices. That's because we pass on the benefits that come from economies of scale and more efficient operations in every area of our business. All with the aim of giving our merchant customers better margins and healthier profits and providing builders and contractors with even better value for money.

**The proven
Bead and Mesh
range, delivered on
time and always
competitively
priced.**



A message from our Managing Director

“ Locusrite is a leading UK manufacturer of proven, high quality bead and mesh products with customers across the UK, Europe, Middle East and Far East. Strong relationships with both customers and suppliers have enabled us to develop a range of products ideally suited to their markets. With continued investment in new highly efficient plant and machinery we are able to offer our range with reduced waiting times and at the most competitive market prices. ”

Paul Rickett, *Managing Director*

Welcome to Locusrite

Locusrite is a leading manufacturer of bead and mesh, fixings, and ancillary products. As part of the Vista Group, the UK's largest independent manufacturer of builders' metalwork, we operate from six UK sites with a turnover circa £40 million. Our ISO 9001, 14001, and 45001 certifications guarantee quality, sustainability, and safety in everything we do.



Certificate Number 14733



ISO 9001
ISO 14001
ISO 45001

	CONTENTS
6	Drylining Beads
8	Plaster and Render Beads
10	External Beads
12-19	PVC-u Beads
20	Lathing Products
21	Security Laths
22-23	Lathing Installation
23	Quality Standards
24-25	Miscellaneous Products
26	Health and safety / Technical Support
27	Bead Selection Guide

Our Policies

CSR

Locusrite is steadfast in its commitment to Corporate Social Responsibility (CSR), focusing on ethical business practices, community engagement, environmental sustainability, and employee well-being. Upholding transparency and integrity, we actively contribute to local communities through outreach and initiatives, while minimising our ecological footprint through sustainable production practices. Our dedication extends to responsible supply chain management, collaborating with suppliers who share our ethical and environmental values. Through transparent reporting, Locusrite aims to be a socially responsible leader in the field, creating lasting value for all stakeholders.

Environmental

Locusrite is dedicated to environmental responsibility through a concise and focused policy. We commit to sustainable operations by minimising waste, optimising resource usage, and adhering to the highest environmental standards and regulations. Emphasising energy efficiency, eco-friendly materials, and waste reduction, we actively engage in continuous improvement initiatives. Our employees are vital in fostering a culture of environmental awareness through training programs. By integrating these principles, Vista Engineering Ltd aims to be a leader in sustainable practices, contributing to a healthier and more environmentally conscious future.


Modern Slavery

Locusrite, part of the Vista Group, is fully committed to eradicating modern slavery and human trafficking in its operations and supply chain. The company maintains a zero-tolerance approach, enforces internal policies, conducts rigorous due diligence on suppliers, and provides ongoing training for procurement teams. These efforts align with the group's compliance with the Modern Slavery Act 2015. The Board of Directors, led by Group Managing Director Philip Travis, approved this statement on November 10, 2021, reinforcing the company's dedication to transparent and ethical business practices.



Certificate Number 14733
ISO 14001

Manufacturing Capabilities

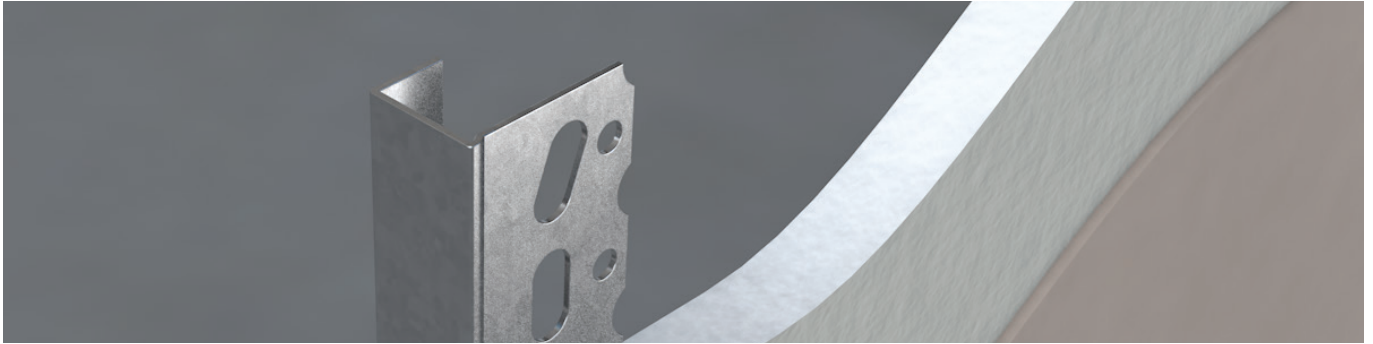

Engineered Strength

Our five UK manufacturing sites follow strict Good Manufacturing Practice (GMP) principles, ensuring safety, quality, and reliability. Our comprehensive Quality Management System, certified to ISO 9001, covers every aspect of production - from material selection to final inspections.

We source high-grade steel from reliable suppliers, rigorously inspecting and testing it to meet exacting standards. Each manufacturing step, from preparation to finishing, is precisely controlled and meticulously documented. Our skilled workforce, trained in GMP and product knowledge, maintains consistent operational practices and careful handling to support overall product compliance. In-process and final testing ensures our products meet performance and quality benchmarks.

Any process changes are thoroughly evaluated to maintain consistency, with regular audits confirming compliance. This rigorous approach delivers superior products that contribute to safer, more durable construction projects.

**We source
high-grade steel from
reliable suppliers,
rigorously inspecting and
testing it to meet
exacting standards.**

**Any process
changes are
thoroughly
evaluated to maintain
consistency.**



Certificate Number 14733
ISO9001


Drylining Beads

The following beads provide the plasterer with the ability to produce true straight edges in drylining applications and give an excellent key for thin coat (skim) plastering. Fixing of all the products is simple and the beads give good resistance to cracking, chipping and impact damage on corners and edges.

GPTCB Galvanised Perforated Thin Coat Bead

A thin coat board bead for plaster skimming on plasterboard lined walls or overskim of existing plastered walls. Plaster depth 2/3mm. Nail holes for easy fix with drywall nails. Scalloped edge for an excellent plaster key. Internal use only.



Code	Size	Per Box
GPTCB24	2.4m x 22mm wing	50 lengths
GPTCB27	2.7m x 22mm wing	50 lengths
GPTCB30	3.0m x 22mm wing	50 lengths



GMMB Galvanised Mini Mesh Bead

A thin coat bead with fine mesh wings designed for one coat plastering. Plaster depth 3mm. Fix with nails or plaster dabs. Use on plasterboard lined walls or aerated blocks. Internal use only.


Code	Size	Per Box
GMMB24	2.4m x 28mm wing	50 lengths
GMMB27	2.7m x 28mm wing	50 lengths
GMMB30	3.0m x 28mm wing	50 lengths

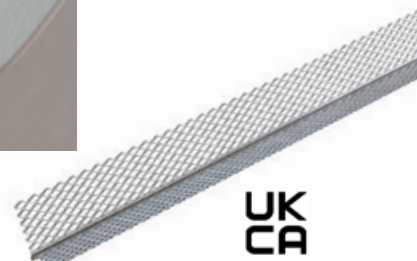

GPPTCB Galvanised Premier Perforated Thin Coat Bead Wide Wing

A perforated thin coat bead as per GPTC above but with slightly wider wings to give a deeper plaster key. Plaster depth 2/3mm. Nail holes for easy fix with drywall nails. Scalloped edge for an excellent plaster key. Internal use only.

Code	Size	Per Box
GPPTCB24	2.4m x 25mm wing	50 lengths
GPPTCB27	2.7m x 25mm wing	50 lengths
GPPTCB30	3.0m x 25mm wing	50 lengths
GPTCB3025	2.4m x 30mm wing	50 lengths
GPTCB3030	3.0m x 30mm wing	50 lengths



GEB Galvanised Plasterboard Edge Bead

A bead to reinforce the edges of plasterboard which can be fixed either with the perforated flange on the face of the board by nailing and skimmed over or with the short flange on the board face for a decorative edge finish. Internal use only.

Code	Size	Per Box
GEB9530	3.0m x 9.5mm	50 lengths
GEB12530	3.0m x 12.5mm	50 lengths
GEB1530	3.0m x 15mm	50 lengths



G3ARSB Galvanised Dry Wall Stop Bead

A bead for protection of thin coat plaster at edges and reveals and for abutment of thin coat plaster against other wall finishes. Also sometimes used as an arch bead. Nail holes for easy fix with drywall nails. Rigid but light bead perforated for an excellent thin coat plaster key. Either 3mm or 6mm Stop. Internal use only.



Code	Size	Per Box
G3ARSB24	2.4m x 3mm	50 lengths
G3ARSB30	3.0m x 3mm	50 lengths
G6ARSB24	2.4m x 6mm	50 lengths
G6ARSB30	3.0m x 6mm	50 lengths



GCJB30 Aluminium Control Joint Bead

An aluminium bead used to control and relieve stress and movement in drywall, preventing damage by accommodating expansion and contraction of up to 7mm.



Code	Size	Per Box
GCJB30	3.0m x 50mm wing	10 lengths

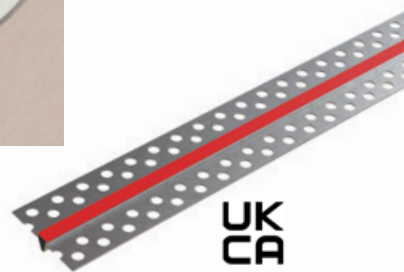

GTCB135 Galvanised Thin Coat Angle Bead 135°

Our 135° Thin Coat Angle Beads are designed for plaster skimming on plasterboard walls with a plaster depth of 2-3mm. They provide structural support and maintain precise 135° corner angles, featuring nail holes for easy fixing with drywall nails and a scalloped edge for excellent plaster grip. Suitable for internal use only.



Code	Size	Per Box
GTCB13524	2.4m x 30mm wing	10 Box
GTCB13530	3.0m x 30mm wing	10 Box

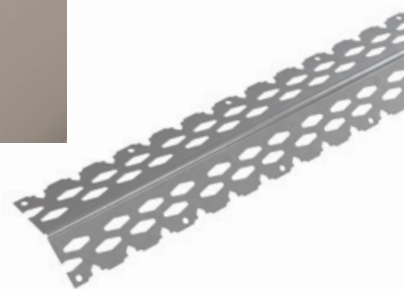

GDWFB Galvanised Drywall Feature Bead

Our Galvanised Feature Beads are designed to create crisp shadow-line features, decorative architectural reveals, and neat plaster stops around door frames, windows, and ceiling junctions. Available in engaging (GED) or abutting (GAD) profiles, they deliver a precise, clean edge separating plasterwork from adjoining materials. Featuring perforated metal wing to ensure maximum plaster keying and edge protection against cracking, they streamline the creation of modern drylining details. Suitable for internal use only.

Code	Size	Per Box
GEDWFB30	3m x 12.5mm x 25mm	50 Box
GADWFB30	3m x 12.5mm x 25mm	50 Box

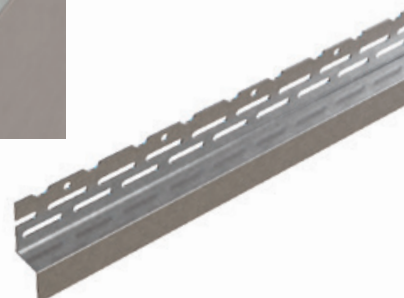


Plaster and Render Beads

The following beads are designed to give true corners and edges to plaster and render where thick or 'rough' coats are required. Fixing is easy using plaster dabs or galvanised nails (with galvanised beads) and the mesh wings provide resistance to cracking while offering a good key to the plaster or render.

GAB Standard Galvanised Angle Bead, Mesh Wing

This traditional wet plaster bead provides a strong true corner or arris, with the mesh wings allowing for a good plaster key and resistance to cracking. Fixed by plaster dabs at approximately 600mm centres, push the wings into the dabs to allow for the required plaster depth up to 13 mm then ensure the nose is set square and plumb as required. Generally for internal use only.


Code	Size	Per Box
GAB24	2.4m x 43mm wing	50 lengths
GAB27	2.7m x 43mm wing	50 lengths
GAB30	3.0m x 43mm wing	50 lengths
GPAB24	2.4m x 48mm wing	50 lengths
GPAB30	3.0m x 48mm wing	50 lengths

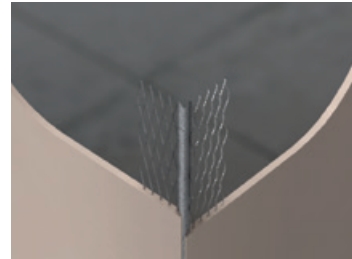

GJAB Galvanised Wide Angle Bead 63mm Wing

As the galvanised angle bead above but with a wider wing to allow for more uneven corners and slightly deeper plaster up to 20mm.



Code	Size	Per Box
GJAB24	2.4m x 63mm wing	50 lengths
GJAB30	3.0m x 63mm wing	50 lengths

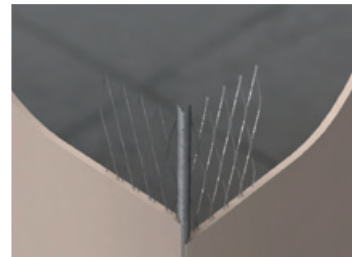

GPSB Galvanised Plaster Stop Bead

Code	Size	Per Box
G10PSB24	2.4m x 10mm	50 lengths
G10PSB27	2.7m x 10mm	50 lengths
G10PSB30	3.0m x 10mm	50 lengths
G13PSB24	2.4m x 13mm	50 lengths
G13PSB27	2.7m x 13mm	50 lengths
G13PSB30	3.0m x 13mm	50 lengths
G16PSB24	2.4m x 16mm	50 lengths
G16PSB27	2.7m x 16mm	50 lengths
G16PSB30	3.0m x 16mm	50 lengths
G19PSB24	2.4m x 19mm	50 lengths
G19PSB27	2.7m x 19mm	50 lengths
G19PSB30	3.0m x 19mm	50 lengths

Provides a straight and clean edge to wet plaster where it butts up to other materials such as door and window frames. Fixed with plaster or mortar dabs as above or can be nailed. Generally for internal use only (stainless steel or PVC-u recommended for external use).

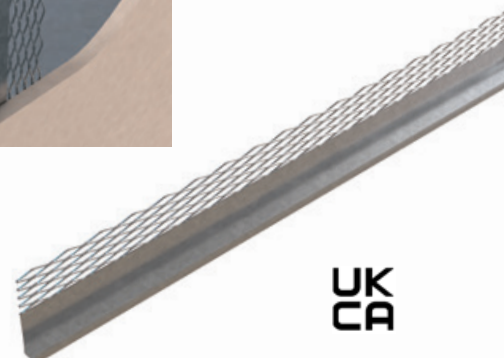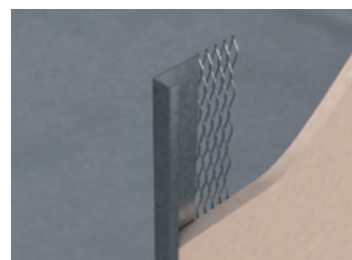


GERSB

Galvanised External Render Stop (Bell) Bead

Used where a neat drip or 'bell-shaped' lower edge is needed on external render. Fixed by mortar dabs or masonry nails. Although this is for external use we would generally recommend stainless steel or PVC-u for this application only using this product in sheltered or low rainfall areas.

Code	Size	Per Box
GERSB24	2.4m x 22mm	50 lengths
GERSB16	3.0m x 16mm	50 lengths
GERSB30	3.0m x 22mm	50 lengths


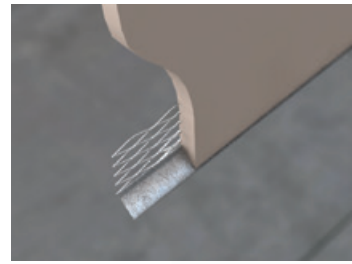


UK
CA

GMB Galvanised Movement Bead

Designed to be used to form movement joints in plaster or render where long wall runs either have movement joints in situ or where there is a need to allow for differential or thermal movement. The bead consists of two plaster stop lengths joined by a white pvc extrusion which allows for up to 4mm of movement and is covered by a vinyl tape which is removed after plastering or rendering. Internal use only. We recommend stainless steel or PVC-u for external rendering.

Code	Size	Per Box
G10MB30	3.0m x 10mm	10 lengths
G13MB30	3.0m x 13mm	10 lengths
G16MB30	3.0m x 16mm	10 lengths
G19MB30	3.0m x 19mm	10 lengths

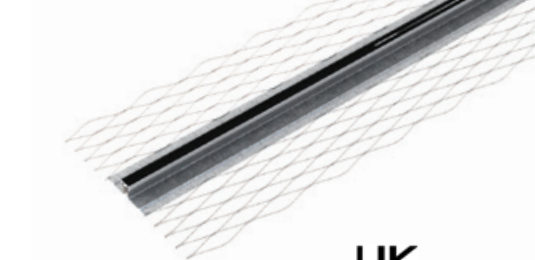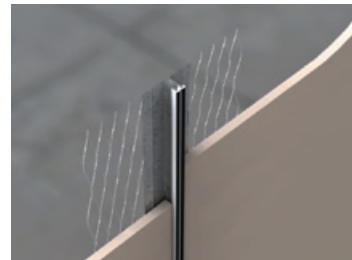


UK
CA


GARB Galvanised Architrave Bead

A range of beads produced to allow for decorative finishes i.e. shadow lines and recesses around door and window frames etc. The bead can either be supplied as an engaging bead or abutting bead with various plaster depths available. Internal use only.

Code	Size	Per Box
G10EABF30 ENGAGING	3.0m x 10mm engaging (without flange)	50 lengths
G13EABF30 ENGAGING	3.0m x 13mm engaging (without flange)	50 lengths
G10ABF30 ABUTTING	3.0m x 10mm abutting (with flange)	50 lengths
G13ABF30 ABUTTING	3.0m x 13mm abutting (with flange)	50 lengths
G25ABF30 ABUTTING	3.0m x 20mm abutting (with flange)	25 lengths

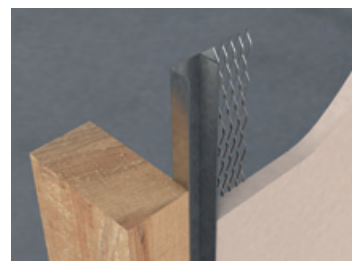

Abutting bead shown.

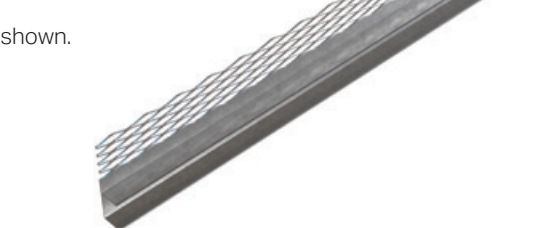

UK
CA



External Beads

The following beads are generally for use with external renders or areas where there is high moisture / humidity or where applying a polymer modified or sand / cement finish. The mesh wings provide an excellent mortar key and the solid edges create true straight arrises, corners and finishes to render runs. Fixing is generally by mortar dabs or stainless steel nails or staples. Galvanised fixings should not be used to avoid bi-metallic reactions which cause rust spots.

SSAB Stainless Steel Angle Bead

The traditional render corner bead providing a strong true corner or arris, with the mesh wings allowing for a good plaster key and resistance to cracking. Fixed by mortar dabs at approximately 600mm centres, push the wings into the dabs to allow for the required render depth-up to 13mm then ensure the nose is set square and plumb as required.

Code	Size	Per Box
SSAB30	3.0m x 50mm wing	50 lengths
SSJAB30	3.0m x 60mm wing	50 lengths

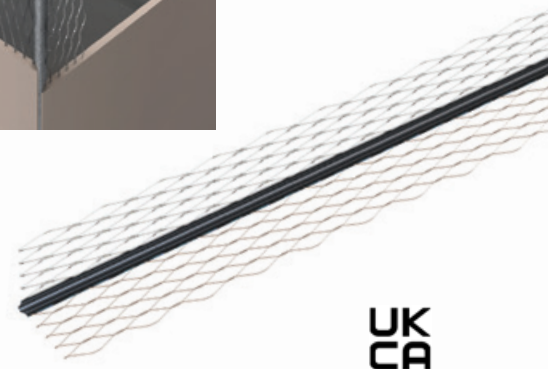



UK
CA

SSPSB Stainless Steel Plaster Stop Bead

Provides a straight and clean edge to render where it butts up to other materials such as door and window frames. Fixed with mortar dabs, or nailed using stainless steel fixings.

Code	Size	Per Box
SS10PSB30	3.0m x 10mm	50 lengths
SS13PSB30	3.0m x 13mm	50 lengths
SS16PSB30	3.0m x 16mm	50 lengths
SS19PSB30	3.0m x 19mm	50 lengths

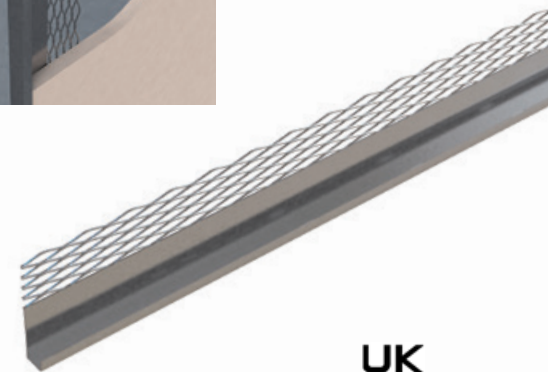

UK
CA

**Mesh
wings provide
an excellent
mortar key**





SSERSB

Stainless Steel External Render (Bell) Bead

Used where a neat drip or 'bell-shaped' lower edge is needed on external render. Fixed by mortar dabs or stainless steel nails.

Code	Size	Per Box
SSERSB30	3.0m x 22mm	50 lengths

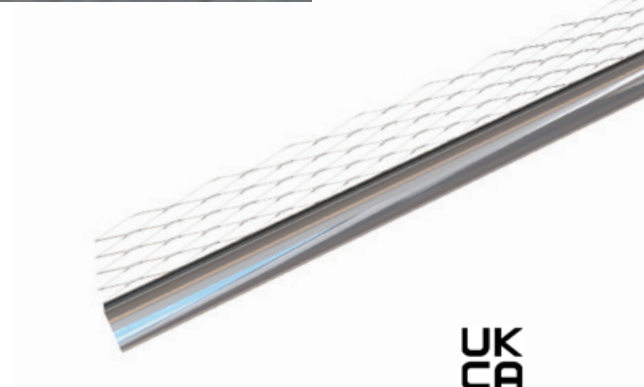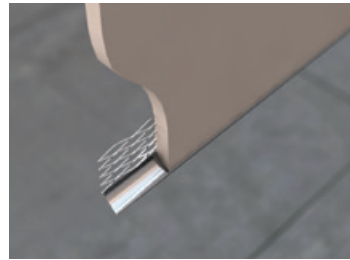


UK
CA


SSMB Stainless Steel Movement Bead

Designed to be used to form movement joints in render where long wall runs either have movement joints in situ or where there is a need to allow for differential or thermal movement. The bead consists of two plaster stop lengths joined by a white pvc extrusion which allows for up to 4mm of movement and which is covered by a vinyl tape which is removed after plastering or rendering.

Code	Size	Per Box
SS10MB30	3.0m x 10mm	10 lengths
SS13MB30	3.0m x 13mm	10 lengths
SS16MB30	3.0m x 16mm	10 lengths
SS19MB30	3.0m x 19mm	10 lengths

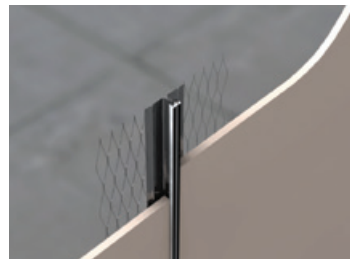

UK
CA

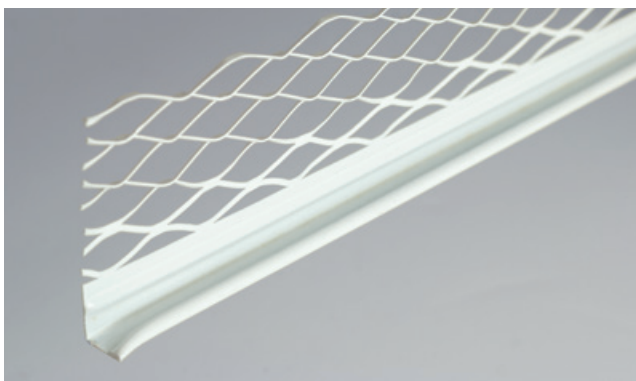

A vast range of powder coated beads are available to order, please contact us for more information on availability and/or sample requests.


PVC-u Beads

PVC-u beads are now being used more and more, particularly in areas of high rainfall or extreme damp conditions. They provide an economical alternative to stainless steel products and are used in the same way as normal galvanised or stainless steel beads. They are manufactured from white high density polyvinylchloride high impact window grade material. Other colours are available and manufactured to order. The face of the bead is ribbed and perforated to produce a good plaster or mortar key and can be easily cut to size using a hacksaw.

TLPAB 23 PVC-u Angle Bead Thincast

A PVC-u equivalent to a mini mesh or perforated thin coat bead for use with plasterboard where a skim coat is required. Fixed using drywall nails or jointing filler, the profile allows for a 2 mm to 3 mm plaster coat to provide a neat corner edge. Internal use only.

Code	Size	Per Box
TLPAB23	2.5m x 25mm	50 lengths


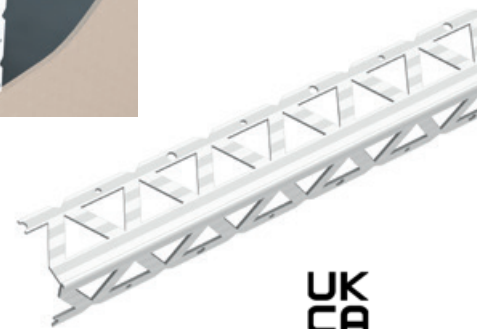


UK
CA

TLPAB PVC-u Angle Bead

A PVC-u equivalent to traditional plaster and render corner beads. The wing size is the same for all sizes and provides a good key for plaster or mortar. The nose length varies to accommodate increasing depths of plaster or mortar. Fixed with either plaster or mortar dabs or nails. Internal and external use.

Code	Size	Per Box
TLPAB625	2.5m x 6mm	50 lengths
TLPAB1025	2.5m x 10mm	25 lengths
TLPAB1325	2.5m x 13mm	25 lengths
TLPAB1525	2.5m x 15mm	25 lengths
TLPAB630	3.0m x 6mm	50 lengths
TLPAB1030	3.0m x 10mm	25 lengths
TLPAB1530	3.0m x 15mm	25 lengths

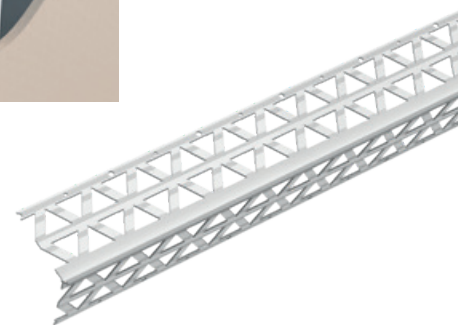

UK
CA

TLPARB PVC-u Arch Bead

A flexible bead allowing the plasterer to form a dry wall corner arch to the radius of their choice. The nose allows for 2mm of plaster skim and forms a stop for the plaster. The bead can be fixed by nailing, jointing filler or adhesive to plasterboard. Internal use only.

Code	Size	Per Box
TLPARB	2.5m x 25mm	50 Box
TLPARB2530	3.0m x 25mm	25 Box



UK
CA


Colour Options

IVORY
WHITE

TLPSB PVC-u Plaster Stop Bead

Used to provide a straight clean finish on the edge of plaster or render at door or window opening and to protect and reinforce this edge. Used in the same way as a steel plaster stop, this bead comes in five different depths for use with either plaster or external render. Fixing by nailing or plaster/mortar dabs the bead provides a straight edge to separate plaster or mortar from other materials. Internal and external use.


Code	Size	Per Box
TLPSB03	2.5m x 3mm x 30mm wing	50 Box
TLPSB450	2.5m x 4mm x 42mm wing	50 Box
TLPSB625	2.5m x 6mm x 42mm wing	25 Box
TLPSB1025	2.5m x 10mm x 42mm wing	25 Box
TLPSB1030	3.0m x 10mm x 42mm wing	25 Box
TLPSB1325	2.5m x 13mm x 42mm wing	25 Box
TLPSB1525	2.5m x 15mm x 42mm wing	25 Box
TLPSB1530	3.0m x 15mm x 42mm wing	25 Box
TLPSB2025	2.5m x 20mm x 42mm wing	25 Box

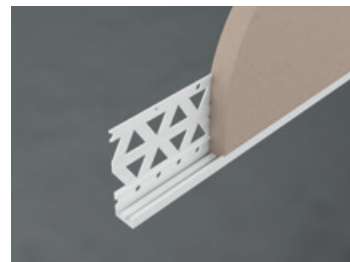
**UK
CA**

TLPERS External Render Stop (Bell) Bead

For use with external render to provide a drip feature at the bottom of the render coat. Fixed using either mortar dabs or masonry nails the bead forms a straight edge to the bottom of the render.


Code	Size	Per Box
TLPERS1025	2.5m x 10mm render depth x 42mm wing	25 Box
TLPERS625	2.5m x 6mm render depth x 42mm wing	25 Box
TLPERS1525	2.5m x 15mm render depth x 42mm wing	25 Box
TLPERS2025	2.5m x 20mm render depth x 42mm wing	25 Box

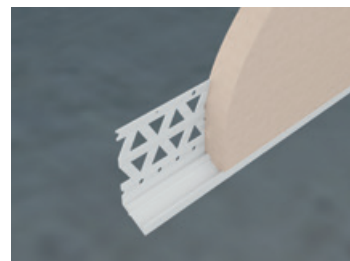
**UK
CA**

TLPMB PVC-u Movement Bead

Designed to form a movement joint where needed in a long run of plastered or rendered masonry where there is a movement joint or to allow for thermal or differential movement in a long run of plaster or render. The bead consists of two plaster stop beads joined with a white extrusion allowing for approximately 4mm of movement when installed vertically. Internal and external use.


Code	Size	Per Box
TLP06MB25	2.5m x 6mm	25 Box
TLP10MB25	2.5m x 10mm	25 Box
TLP15MB25	2.5m x 15mm	25 Box
TLP20MB25	2.5m x 20mm	25 Box

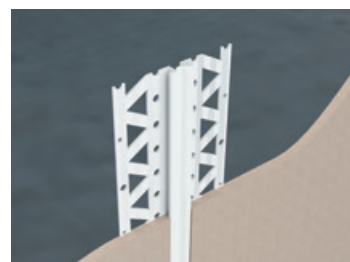
**UK
CA**

TLPABBULLIN PVC-u Bullnose Corner Bead

A PVCu alternative to traditional drywall bullnose corner beads. Designed for a smooth, rounded finish on external corners, it provides a clean and durable edge for plasterboard installations. The consistent wing size ensures a secure fit and strong key for the plaster, while the bullnose profile delivers a softer, more decorative corner detail. Suitable for fixing with drywall screws or adhesive. Ideal for internal use.

Code	Size	Per Box
TLPABBULLIN	2.5m x 23mm nose	100 Box

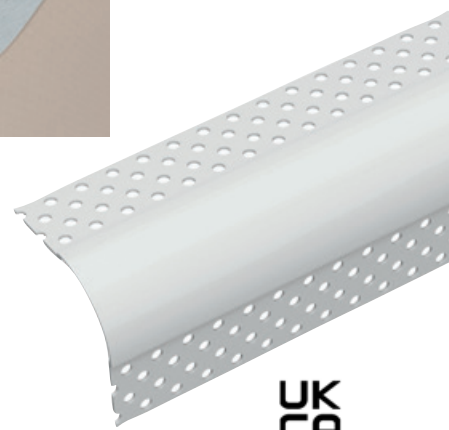



UK
CR

TLPMWAB


PVC-u Meshed Wing No-Nose Angle Bead

A PVC-u render corner bead with no nose, supplied in 2.5 m lengths. Designed for external render systems to form crisp 90° corners around windows, doors and reveals. The extended mesh wings provide extra reinforcement at stress points, helping to prevent cracking and deliver a strong, clean finish. For use with all standard render and EWI systems. External use only.

Code	Size	Per Box
TLPMWAB	2.5m x 150mm x 100mm	50 Box
TLPMWAB 100/100/50	2.5m x 100mm x 100mm	50 Box

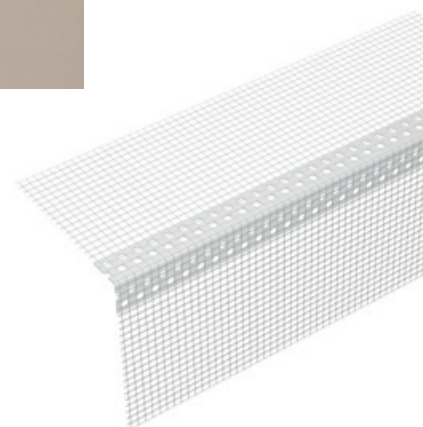


UK
CR

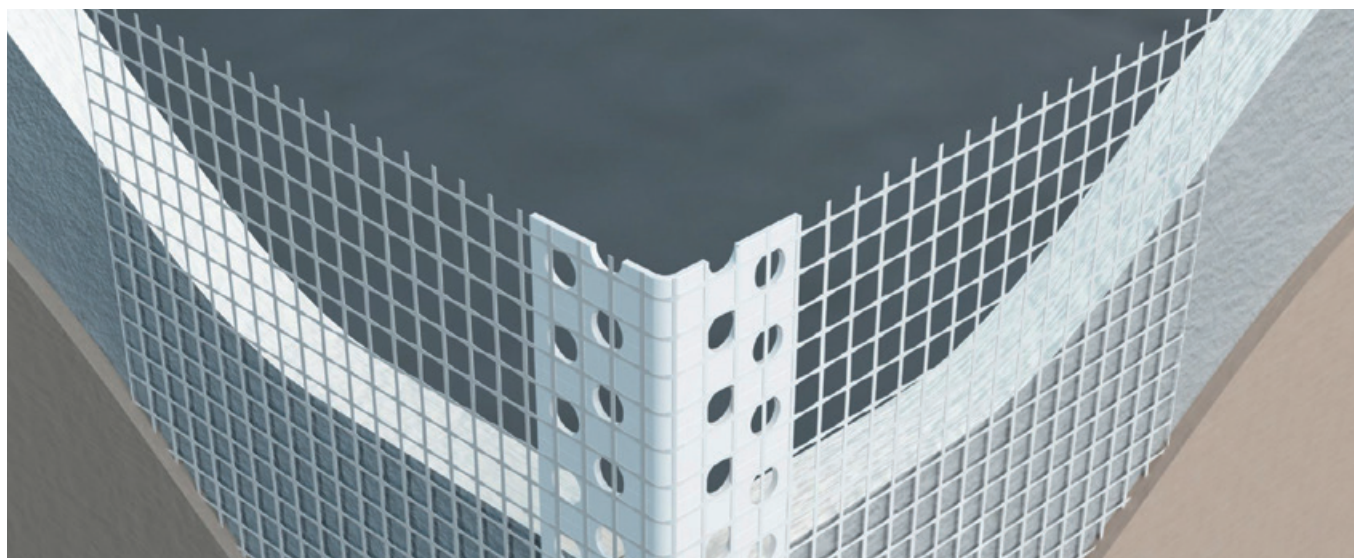

TLPENGB PVC-u Engaging Feature Bead

A PVCu alternative to traditional galvanised engaging feature beads. Designed to create precise shadow lines and recess details around door and window frames, it delivers a clean, decorative finish for plasterboard installations. The durable PVCu construction offers excellent moisture resistance and eliminates the need for painting, making it a low-maintenance solution. Suitable for internal use and ideal for achieving crisp, contemporary detailing in any interior space.

Code	Size	Per Box
TLP125ENGB	2.5m x 12.5 mm feature	100 Box
TLP15ENGB	2.5m x 15 mm feature	100 Box





UK
CA

TLPEB PVC-u Plasterboard Edge Bead

A PVC-u edge bead for plasterboard and cement board, providing a lightweight, rust-proof alternative to metal beads. Protects and reinforces exposed edges at windows, door frames, skirting, changes of finish or system perimeters. Perforated wing ensures strong plaster key and impact resistance while delivering a crisp, crack-resistant finish. Available in various depths, easily cut to length. For internal skim or decorative plaster coats. Internal use only

Code	Size	Per Box
TLP125EB	2.5m x 12.5mm	50 Box
TLP15EB	2.5m x 15mm	50 Box

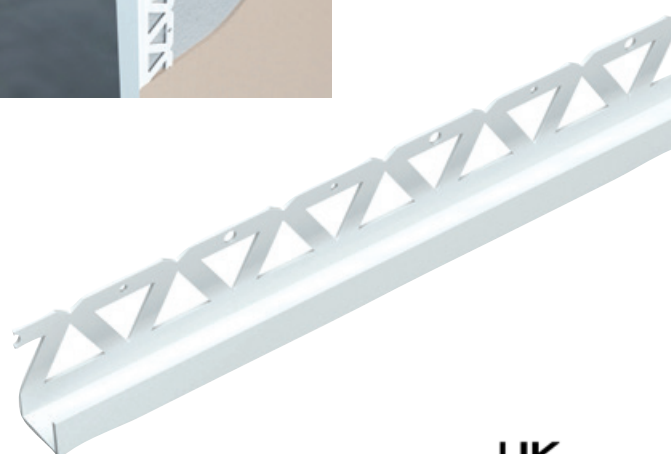



UK
CA



ALBT Aluminium Base Starter Track


An aluminium starter track trim for EWI systems which is used to perform a starting point just above the damp course to provide a sturdy and protective encasement for insulation boards. It is easily installed (with the addition of our fixings, spacers and joining pieces) and is highly durable. The width of the starter track should match the thickness of insulation board requirements. External use only. Fix at 300mm centres.

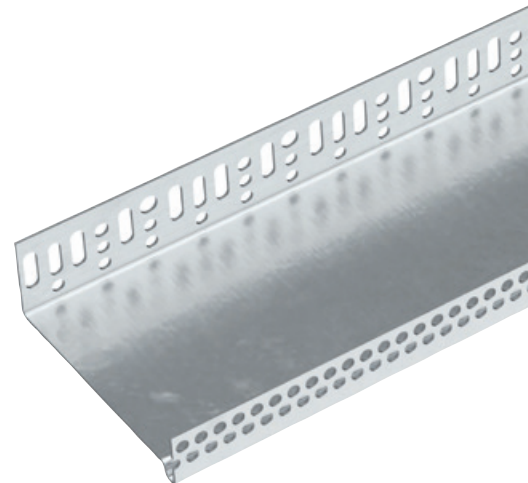

Code	Size	Units
ALBT2325	2.5m x 23mm	20 lengths
ALBT3325	2.5m x 33mm	20 lengths
ALBT4325	2.5m x 43mm	20 lengths
ALBT5325	2.5m x 53mm	20 lengths
ALBT6325	2.5m x 63mm	20 lengths
ALBT7325	2.5m x 73mm	20 lengths
ALBT8325	2.5m x 83mm	20 lengths
ALBT9325	2.5m x 93mm	10 lengths
ALBT10325	2.5m x 103mm	20 lengths

ALTHAM Hammer action Screw


The Locusrite hammer-in anchor is a purpose-designed fastener for the secure and efficient fixing of base profiles in External Thermal Insulation Composite Systems (ETICS). It features a mushroom-shaped head and an integrated metal pin, providing high resistance to pull-through of the base profile while ensuring firm contact and stability against the substrate.



Code	Size	Units
ALTHAM0640	6m x 40mm	50 Box
ALTHAM0660	6m x 60mm	50 Box

ALTSPACE Base Track Spacer Piece

The Locusrite PVC spacer is designed for levelling uneven substrates when anchoring base profiles with hammer-in anchors in ETICS systems, helping ensure a straight, stable installation. Its durable PVC construction prevents base profile deformation, while the distinctive "snowman" shape allows quick, secure clamping onto any dowel diameter. Colour-coded thicknesses make selection easy on site, and integrated reinforcing ribs provide added rigidity and reliable support during fixing.



Code	Size	Units
ALTSPACE03	3mm	50 Box
ALTSPACE05	5mm	50 Box
ALTSPACE10	10mm	50 Box
ALTSPACE15	15mm	50 Box





TLPABBOX PVC-u

Variable Angle No Nose Angle Bead with Mesh

A PVC meshed wing angle bead with adjustable/variable angle for protection of unusual angles/edges & corners in ETICS systems. Internal and external use.

Code	Size	Units
TLPABBOX	200mm x 25m	1 Roll

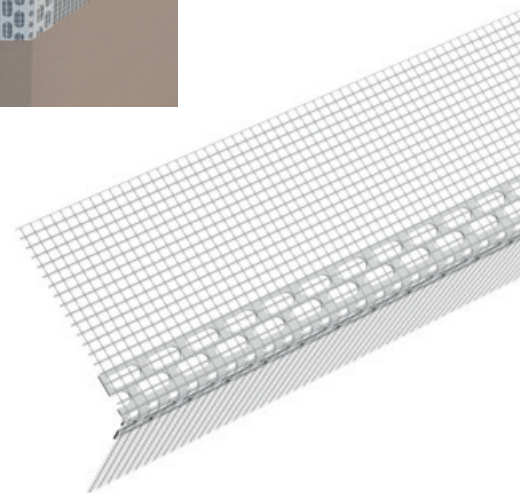



TLPAB23VARIABLE PVC-u

Corner Bead with Variable Angle

A PVC-u flexible angle bead for joining of 2 areas at a variable angle in drywall construction, suitable for up to 3mm plaster thickness, minimises the time required to form perfect unusual angles, no risk of corrosion. Internal use only.



Code	Size	Units
TLPABB23VARIABLE	3 x 25mm x 25m	1 Roll

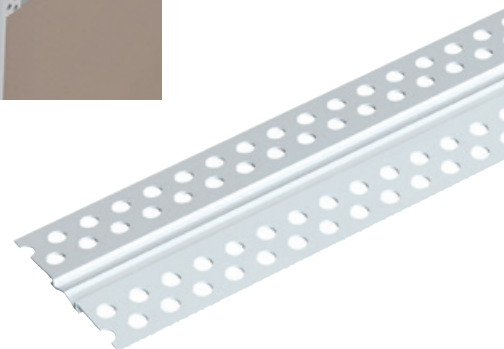

TLPARBMESH PVC-u Arch Bead with Mesh


PVC Arch Corner Bead for ETICS with glass fibre mesh for edge protection of arcs of various radii in thermal insulation systems, prevents hairline cracks, creates the ideal arch edge. Internal use only.

Code	Size	Units
TLPARBMESH	2.5m x 100 x 150mm	50 Lengths

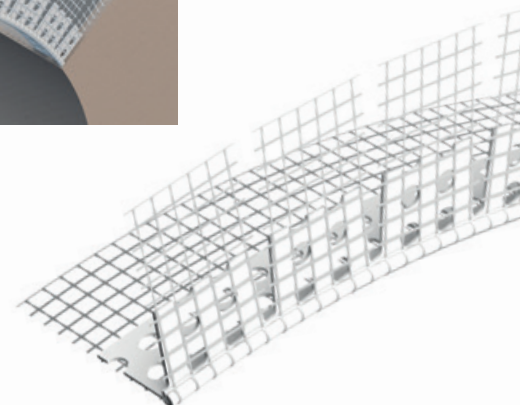

TLPERSMESH Base Track Clip-on Drip Bead

A PVC clip on profile drip bead with fibre-glass mesh used for clipping onto EWI base starter track to provide a neat drip edge for rendering into. This bead provides suitable water drainage from the surface preventing travel back towards the wall and possible damp issues. The mesh works to combine the track with reinforcement mesh which increases the durability and strength of the system.




Code	Size	Units
TLPARBMESH-1	2.5m x 100mm	25 Lengths

TLPMWABNOSED PVC-u

Meshed Wing Nosed Angle Bead


A PVC render meshed wing corner bead used for thin-coat render systems on 90degree angles. The meshed wing integrate the bead into the render system for strength and durability and the nosed point is typically used as a depth guide but also offers extra impact resistance.



Code	Size	Units
TLPMWAB0325NOSED	2.5m x 3mm x 100mm	25 Lengths
TLPMWAB0625NOSED	2.5m x 6mm x 100mm	25 Lengths

TLPSBMESH PVC-u Stop Bead with Mesh

PVC Stop Bead with glass fibre mesh to provide extra durability and a professional straight line finish. It features a 100mm mesh wing that contributes to maintaining the systems integrity. Internal and external use..





Code	Size	Units
TLPSB0325MESH	2.5m x 3mm x 100mm mesh	25 Lengths
TLPSB0625MESH	2.5m x 6mm x 100mm mesh	25 Lengths
TLPSB1025MESH	2.5m x 10mm x 100mm mesh	25 Lengths

TLPWRB PVC-u

Window Reveal Bead with Lip, Mesh and 2D Flex

PVC window reveal bead with fiberglass mesh, a protective lip, and 2D elastic connection for advanced anti-crack protection. It ensures a clean, flexible connection between window/door frames and EIFS render. Prevents render detachment, enhances aesthetics, and features tape protection to eliminate joint filling and frame staining during rendering. For internal and external use..



Code	Size	Units
TLPWRB0626	2.6m x 6mm x 100mm	30 Lengths
TLPWRB0926	2.6m x 9mm x 100mm	30 Lengths

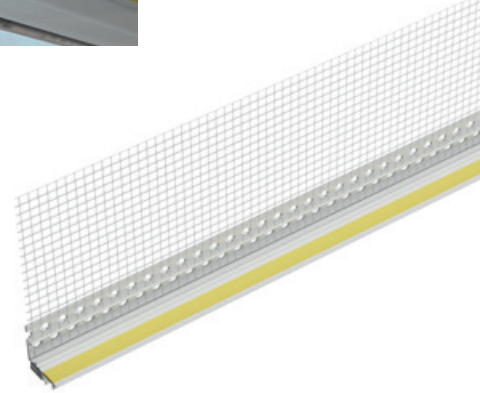

TLPWRBPLAIN PVC-u Window Reveal Bead

A PVC window reveal bead with self-adhesive foam tape, ensuring a perfect finish and flexible frame-to-render connection that eliminates seasonal cracking. The self-adhesive snap-off strip allows for easy protective sheeting during plastering and painting, ensuring a clean substrate without mess or overspray. For internal and external use.

Code	Size	Units
TLPWRBPLAIN6	2.4m x 6mm	60 Lengths
TLPWRBPLAIN9	2.4m x 9mm	60 Lengths

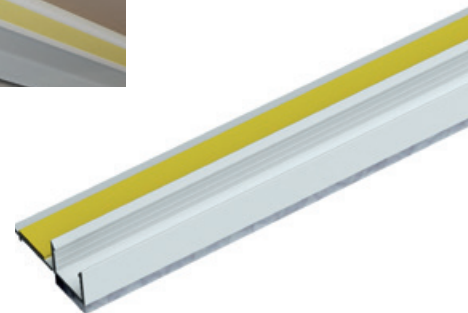



TLPWRBLM PVC-u

Standard Window Reveal Bead with Lip/Mesh

PVC Window reveal bead with glass fibre mesh and protective lip for clean finish & elastic connection of the window/door frame to render in thermal insulation systems (EIFS). Prevents render detachment from window or door frame, protective lip for aesthetic detail and tape protection which eliminates need for additional joint filling, protects frame against staining during rendering work.

Code	Size	Units
TLPWRBLM6	2.4m x 6mm x 100mm mesh	30 Lengths
TLPWRBLM9	2.4m x 6mm x 100mm mesh	30 Lengths

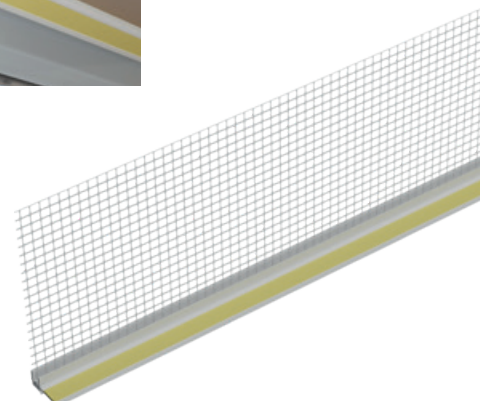


Lathing Products

The following products are used as a key for plaster internally and render externally and can be fixed to brick / block work, timber, steel and concrete when using various propriety fixings. The laths enable the plasterer or renderer to provide a smooth even finish where required.

GEML Galvanised Expanded Metal Lath

A key for plaster on suspended ceilings and walls this versatile product can also be used to encase steel columns and beams to assist in fire protection. Use internally, fixed with galvanised nails, staples or tying wire.

Code	Size	Quantity	Units
GEML	2438mm x 685mm x 0.4mm	10 sheets	Bundle

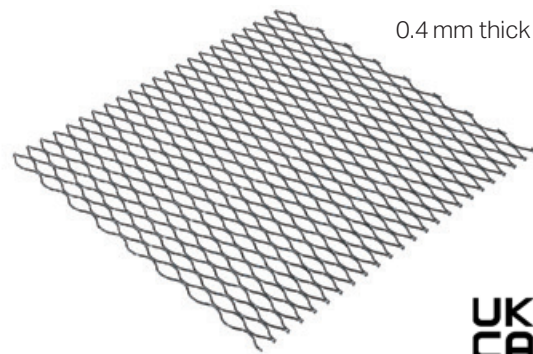


UK
PA

SSEML Stainless Steel Expanded Metal Lath

A key for render work externally or for plaster work internally where damp conditions prevail. Fix with stainless steel nails, staples or wire or alternatively proprietary polypropylene anchors to masonry or concrete.

Code	Size	Quantity	Units
SSEML	2500mm x 700mm x 0.4mm	10 sheets	Bundle

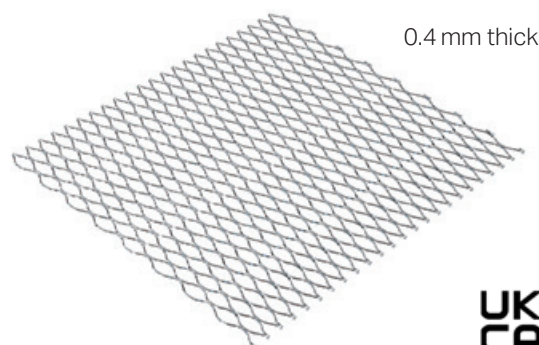


UK
PA

GRL Galvanised Rib-Lath

A key for plastering and rendering rib-lath with its stiffening ribs provides a good key for deeper coatings of plaster or render. As well as being used for walls rib-lath can also be used for partitions and ceilings. Fixed through the rib section with galvanised nails or around the rib with galvanised staples or tying wire.

Code	Size	Quantity	Units
GRL	2500mm x 600mm x 0.4mm	10 sheets	Bundle

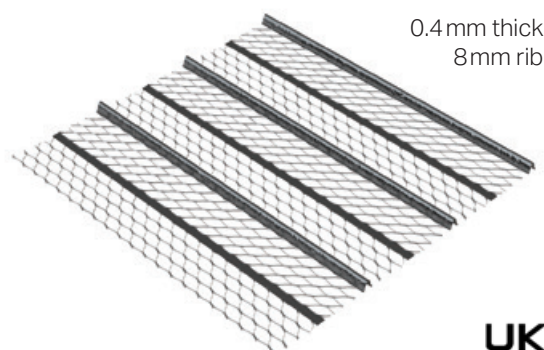


UK
PA

SSRL Stainless Steel Rib-Lath

A key for external render rib-lath with its stiffening ribs provides a good key for deeper coatings of plaster or render. As well as being used for walls rib-lath can also be used for partitions and ceilings. Fixed through the rib section with stainless steel nails or around the rib with stainless steel staples or tying wire. External use only.

Code	Size	Quantity	Units
SRL	2500mm x 600mm x 0.4mm	10 sheets	Bundle

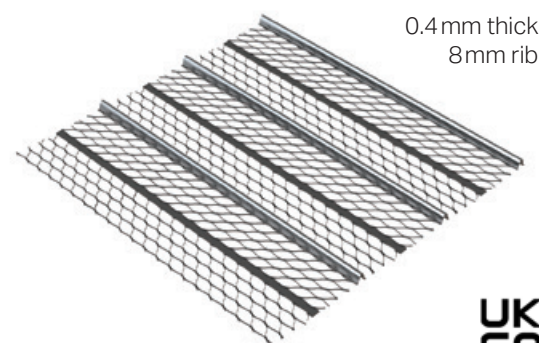

UK
PA

Security Laths


A range of laths for added security to walls, ceilings, partitions and roofs discouraging break ins via these routes. When galvanised the laths can be rendered or plastered to hide their presence. Manufactured in accordance with BS 405: 1987 from HRPO mild steel to BS EN 10111: 1998.

SLLD Security Lath Light Duty

This light duty security lath is a lightweight and economical security lath suitable for internal wall security, partitions, ceilings and roofs. Each sheet weighs approximately 6 kgs and can easily be handled by one man.

Code	LWA*	SWA**	Width	Thickness	Weight (KG/M ²)
SLLD	43.43 mm	18.03 mm	2.31mm	1.2mm	1.85

Sheet Size: 2500mm x 1250mm mild steel or pre-galvanised material.

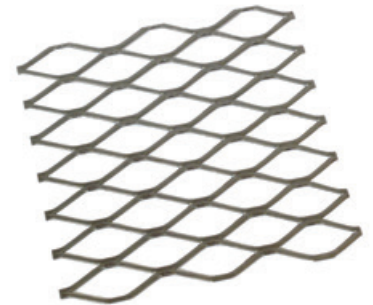

SLHDR Security Lath Heavy Duty Raised

This heavy duty raised security lath is ideal for internal or external brickwork and can act as a key for render or plaster finishes when galvanised.

Code	LWA*	SWA**	Width	Thickness	Weight (KG/M ²)
SLHDR	50.08mm	22.58mm	3.12mm	3mm	6.52

Sheet Size: 2440mm x 1220 mm mild steel or hot dipped galvanised.



SLHD Security Lath Heavy Duty

This heavy duty security lath is suitable for internal wall security, partitions, ceilings and roofs. The mesh has a flattened profile and weighs approximately 20 kgs per sheet.

Code	LWA*	SWA**	Width	Thickness	Weight (KG/M ²)
SLHD	39.12mm	18.29mm	4.5mm	2.5mm	6.7


Sheet Size: 2440mm x 1220 mm mild steel or hot dipped galvanised.



* Long wire aperture. ** Short wire aperture.

Range of metal lathing for internal and external plaster key applications and anti-crack control.

For appropriate fixing of lathing products, please refer to page 14.

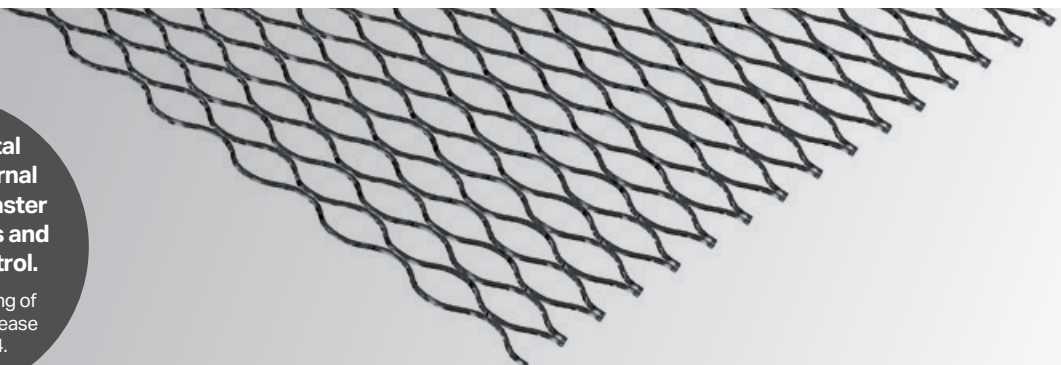

Installation Instructions for Lathing



Fixing Expanded Metal Lathing to Metal or Timber Supports

Fix with the long way of mesh running from support to support, with all strands sloping downwards and inwards from the face of the coating. Always ensure when fixing that allowance is made for overlapping sheets by 50mm lengthways and 25mm widthways.

To connect to timber use 40mm plasterer's nails or staples at 100mm centres. Start at the centre of the sheet and work out towards the edges, always fix at an angle to allow lath to be pulled tight. Ensure that compatible corrosion resistant fixings are used i.e. do not use galvanised fixings with stainless products.

To fix to steel channels, tie with 1.2mm tying wire at 100mm centres. Tie as illustrated with rib-lath below by creating a 'hairpin' shape with the wire, then pull tight and twist. Take care that cut wire ends are not close to plaster surface.

Fixing Expanded Metal Lathing to Solid Backgrounds

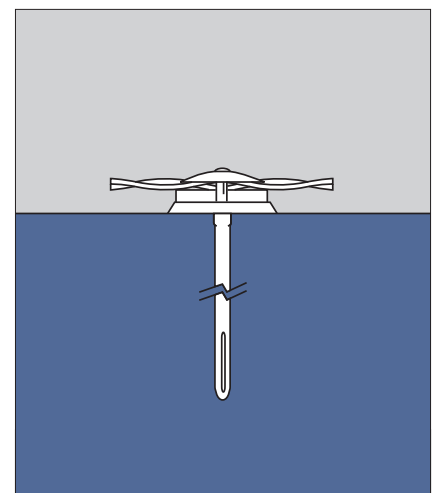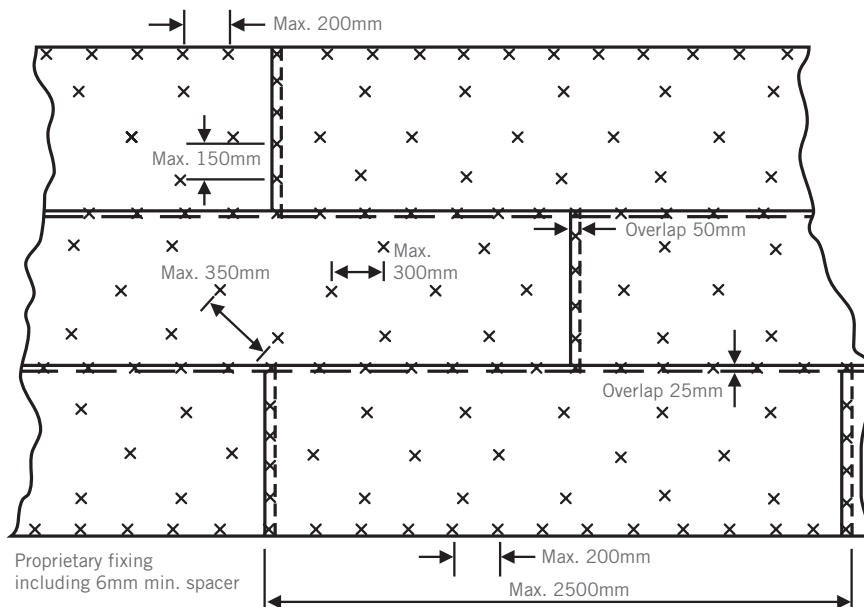


Typical fixing of expanded metal lathing and rib-lath using a proprietary large headed fixing when attaching to solid backgrounds.

When fixing rib-lath ensure that nails fix through the ribs and staples/wire hair pins over the ribs.

Ensure when fixing that 50mm allowance is made for overlapping sheets at ends.


Fixing Rib-Lath to Metal or Timber supports

40mm Nail




Timber studs at max. 600mm centres

30mm Staple



Timber studs at max. 600mm centres


Wire Tie



Metal studs at max. 600mm centres

Installation Instructions for Lathing

Typical Fixing of Rib-Lath to Vertical Solid Background

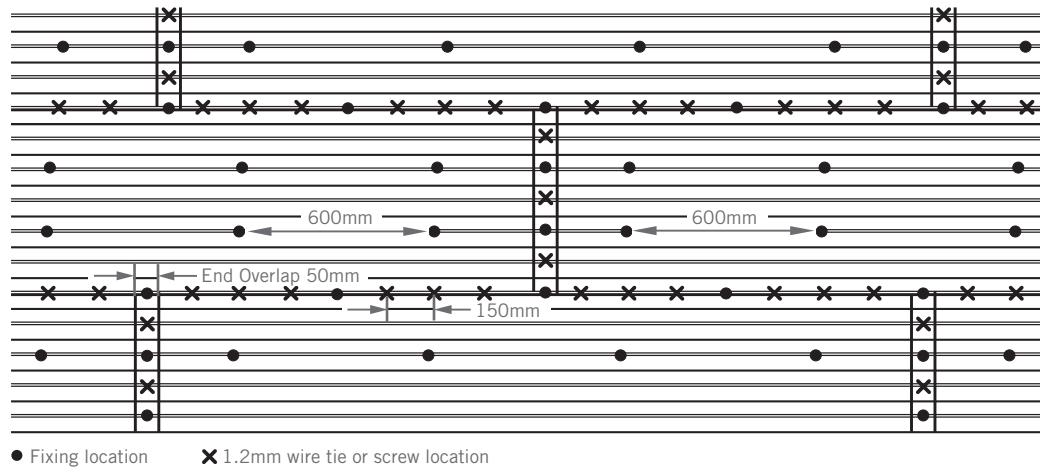

Relevant British / European Standards

Bead Material

Galvanised steel to BS EN 10346:2015 DX51+Z275 (protective coating) and BS EN 10143 (thickness and coating).

Stainless steel - to BSEN 10088-2 grade 1.4301 and 1.4016

PVC-u white high density polyvinylchloride high impact external window grade

Expanded Metal Lathing Material

Galvanised to BS EN 10346:2015 DX51+Z275 (protective coating) and BS EN 10143 (thickness and dimensions)

Stainless steel-austenitic-to BSEN 10088-2 grade 1.4301

Security Laths

Light duty - cold rolled mild steel to BS EN 10130:1991

Heavy duty and raised - HRPO mild steel to BS EN 10111:1998

British Standards

Locusrite galvanised and stainless steel angle beads, plaster stops and external render stops, perforated beads etc. are manufactured in accordance with BS6452 Part 1:1984

Galvanised and stainless steel expanded metal laths and rib-laths are manufactured in accordance with BS1369 Part 1:1987

Security laths are manufactured in accordance with BS405:1987

European Standards

BS EN 13658-1:2005 – Metal Lath and Beads - Definitions, requirements and test method, Part 1: Internal Plastering

BS EN 13658-2:2005 - Metal Lath and Beads – Definitions, requirements and test method, Part 2: External Rendering

BS EN 14353:2017 - Metal beads and feature profiles for use with gypsum plasterboards

Bead Usage

All beads and lathing products need to be fixed in accordance with the following standards:

BS EN 13914-1:2016 - Design, preparation and application of external and internal plastering,

Part 1: External Rendering

BS EN 13914-2:2016 - Design, preparation and application of external rendering and internal plastering,

Part 2: Design considerations and essential principles for internal plastering.

BS 8212:1995 – Code of Practice for Dry Lining and Partitioning using Gypsum Plaster.

Health and Safety

To find out more about our health and safety advice on handling and packaging please contact us for an information sheet or go online at:

www.locusrite.co.uk

Miscellaneous Products

We also offer a range of miscellaneous products from universal wall starter systems through to soffit vent meshes.

V63 Universal Stainless Steel Wall Starter System

The Locusrite Stainless Steel Wall Starter System joins new walls to existing masonry. Suitable for both internal and external brick or block walls, the connectors can be slotted together up to a maximum of 8 metres or 3 storeys high, from 60 to 250mm thick. The pack contains the fixings necessary for a single leaf wall up to 2.4m / 8'.


2 no. Wall connectors 1.2m long, stainless steel

5 no. Plugs, coach screws and washers

10 no. Wall connector ties, stainless steel

Packed in boxes of 10

Code	Size	Units
TTWSKSS-V63	2.4m length (made up of 2 x 1.2m lengths)	10 Box

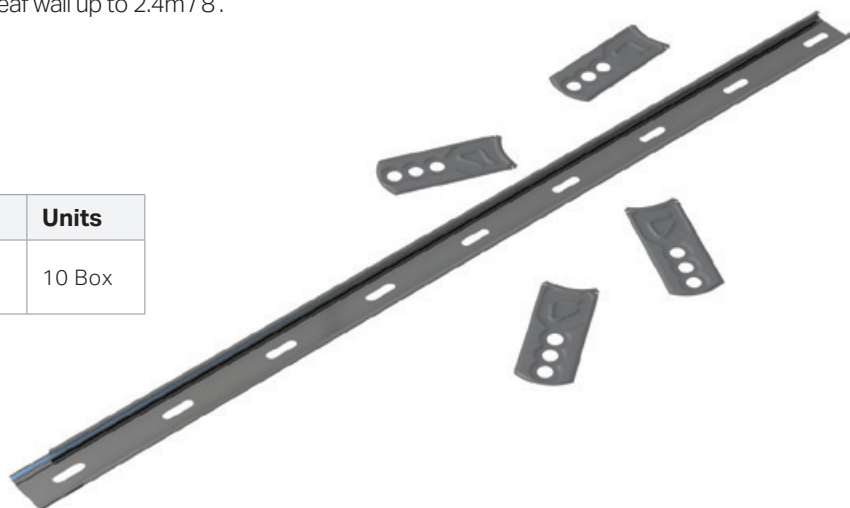

INSTALLATION GUIDE

Installation Note

Prior to installation remove any render or debris from the existing wall.

Internal Walls

1. Plumb the lower connector against the existing wall so that it will be central to the new wall.
2. Mark the position of the fixing holes. Each connector should be fixed at three points, the first and last slot and in the centre. Ensuring that one fixing is at the point where the two connectors slot together and overlap. Fixings should be into brickwork and not mortar joints.
3. Drill and plug using an 8mm masonry drill bit and the plugs provided.
4. Fix the bottom two holes lightly using the stainless steel coach screws and washers.
5. Slot the upper connector into the lower one and repeat the above stages. The upper connector can be cut to length if required.
6. Tighten all fixings using a 10mm socket or box spanner.
7. Build wall in the conventional way with a full mortar joint between the existing and the new wall. Ties should be inserted at a maximum of 300 centres, every third brick course or each block course.

Ensure that the ties and connectors are completely embedded with mortar.

Cavity Walls

Each leaf requires a separate starter system.

External Walls


Ensure that the bottom edge of the connector is above the damp-proof course. A weather seal of approximately 10mm should be created between the connector and the existing wall using a flexible mastic sealant or a compressible sealing strip. Consult your Local Authority, as additional weatherproofing may be required in accordance with local building regulations.



SCA Semi Circular Arch Former

A mesh former allowing the plasterer to produce a clean edged semi-circular arch opening. The arches are supplied as a pack of four pieces and are fixed to each side of the opening then plastered over. An elliptical shape can be produced by using extra bridging pieces supplied as a separate pack. Recommended for internal use only. 1 box contains enough for 1 full arch i.e. 4 pieces


Code	Size	Per Box
SCA750	750mm	Box
SCA800	800mm	Box
SCA850	850mm	Box
SCA900	900mm	Box
SCA1200	1200mm	Box
SCA1500	1500mm	Box

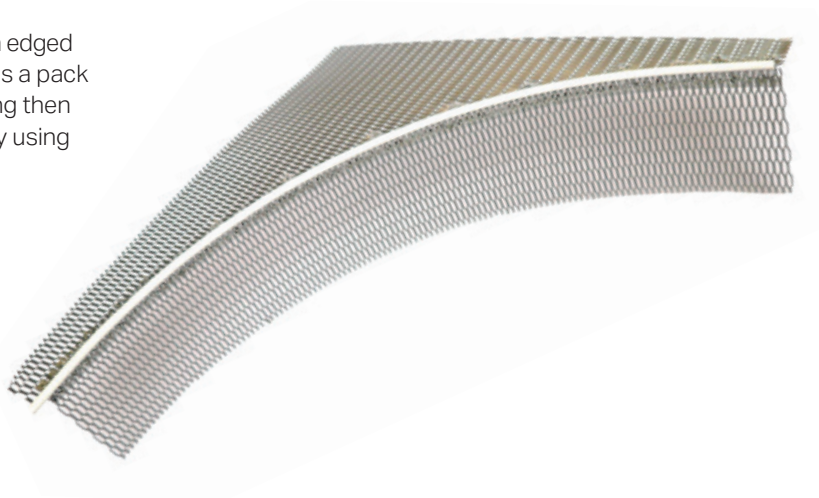

V44 Coil Mesh

An expanded metal mesh available in various widths, stainless or galvanised steel. Designed to be incorporated into masonry for crack control.

Code	Size	Units
GBWR063	65mm Galvanised	20m Coil
GBWR100	100mm Galvanised	20m Coil
GBWR175	175mm Galvanised	20m Coil
GBWR225	225mm Galvanised	20m Coil
GBWR305	305mm Galvanised	20m Coil
SSBWR063	65mm Stainless	20m Coil
SSBWR100	100mm Stainless	20m Coil
SSBWR175	175mm Stainless	20m Coil
SSBWR225	225mm Stainless	20m Coil

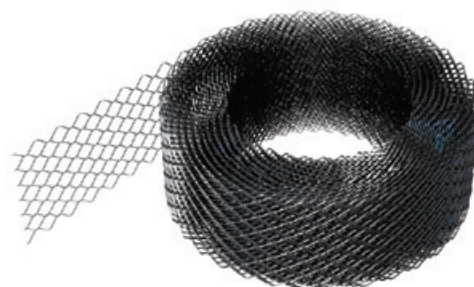

SVM Soffit Vent Mesh

Stainless Steel Soffit Vent Mesh is for use in new build properties. It is used over vents in soffits to allow air flow to prevent condensation but prevents access to birds and insects. It is lightweight and supplied in a dispenser. Soffit Vent Mesh is fixed over the ventilation holes to prevent birds and insects entering the roof void

Code	Size	Units
TSVM3075	75 mm x 30mm	10 Box



Health and Safety

Handling

The nature of cutting metal, as required by the manufacture of Locusrite products, may result in sharp or burred edges. Users should exercise care in handling, using protective equipment where deemed necessary, such as gloves, clothing and eye protection.

Packaging

The steel band used to contain certain products is, by necessity, under tension. Care must be taken when cutting the banding to avoid flying ends etc. The shrink wrap polythene used to contain the product is not acting as protection from sharp edges and care should be taken when handling such items.

Stainless Steel

Steel containing various combinations of different elements, a breakdown of which is available on request. The product is chemically stable except under extreme heats. In its normal state stainless steel represents no health hazards. However, treatment such as welding, grinding or burning can result in fumes and/or the production of airborne particles. The main method of ingestion is by inhalation, which should be avoided by ventilation or local extraction. Exposure limits (ref. H.S.E. Guidance Note EH 40) need to be observed.

Galvanised Mild Steel

Mild Steel with a coating of zinc bonded by an electrolytic process. Exposed to heat in excess of 900 degrees centigrade (by fire, welding or flame cutting) the galvanised coating will oxidise, producing copious zinc oxide fumes. Under these circumstances it is recommended that extraction systems be used to ensure that Occupational Exposure Levels are not exceeded and to avoid metal fume fever.

Relevant References

1. The protection of eyes regulations '1974' B.S.2092, Specification for Industrial Eye Protection.
2. Health and Safety Executive Guidance Notes: MS 15 - Welding, FH 15 - Toxic Substances; EH 25 - Occupational Skin Diseases: Precautionary Policy; EH 40 - Occupational Exposure Limits 1985.
3. Health and Safety at Work Booklets: Lifting and Carrying, Industrial Dermatitis (Precautionary Measures, no. 18).

Technical Support

Technical Support

For any technical queries, data sheets or brochure requests please do not hesitate to contact us on:

Telephone 01621 843100
or email sales@locusrite.co.uk.

We can offer free advice and assist with your product suitability questions on any of the Locusrite stock range.

Technical Information

More in depth technical details can be forwarded upon request.

Storage and Protection

Care should be taken to ensure that steel beads are kept dry, and stored and handled in a way to prevent distortion and general damage, especially to the galvanised coating. This means storing them off the ground on a flat surface.

The risk of corrosion in galvanised beads will normally only become apparent during the initial drying out period of the plaster, which should be kept to an absolute minimum (maximum 5-7 days), and subsequently during periods of heavy condensation and dampness.

Bead Selection Guide - A1 Poster

Available on request: Call 01621 843100 or visit www.locusrite.co.uk.



PLASTERERS BEAD SELECTION GUIDE

Manufacturer of expanded metal
and plasterers accessories

INTERNAL METAL BEADS

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

EXTERNAL METAL BEADS

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

UPVC BEADS

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

General installation information

- Choose the most appropriate bead to suit the application and desired finish.
- Beads should be fixed at a nominal 600mm spacing by using plaster or render dabs or a suitable metal fixing of the same material as the bead.
- Beads can be trimmed using shears and fine tooth saw.
- Avoid damage to the bead and its coating when trowelling.
- Galvanised beads are for internal use, stainless steel beads are for external use specifically for cement based renders only.

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm

REF	GPFCB24	GPFCB27	GPFCB30
Plaster thickness	2-3mm	2-3mm	2-3mm
Wing width	20mm	20mm	20mm
Lengths per box	50	50	50
Box length	2400mm	2700mm	3000mm



Call for further details.




BS EN 13858-1&2
BS EN 14353

Locusrite Limited, Ra Galliford Road, Causeway Industrial Estate, Maldon, Essex CM9 4XD
tel: 01621 843100 email: sales@locusrite.co.uk www.locusrite.co.uk



Products in Action

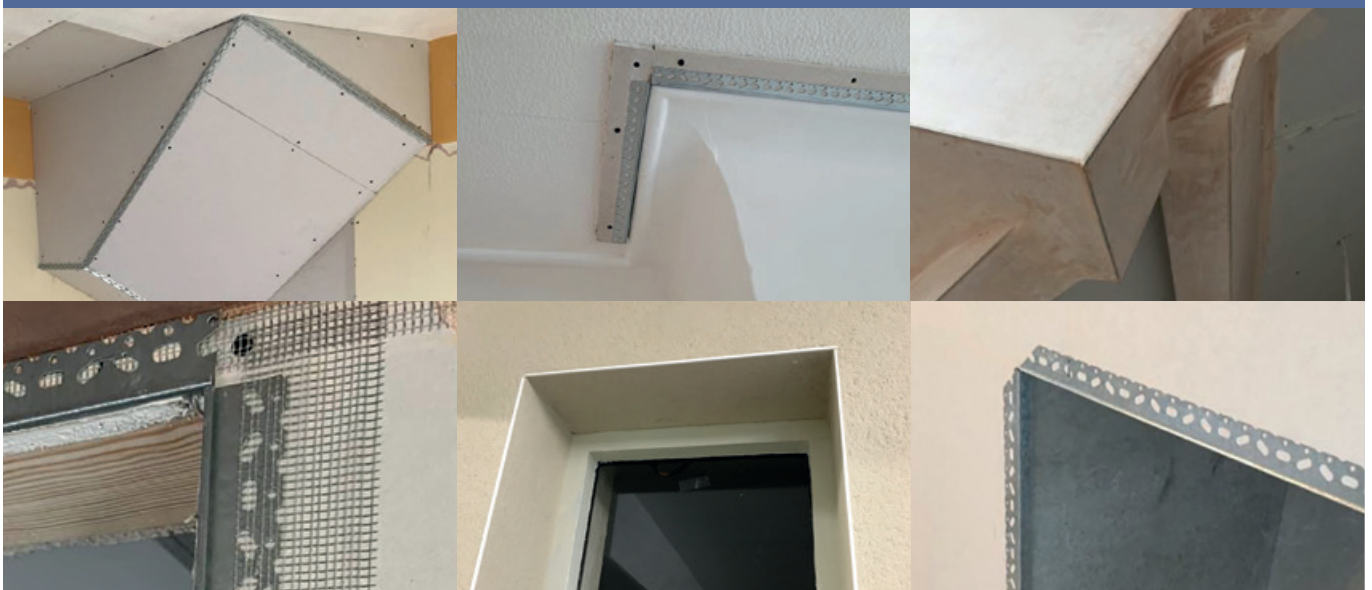

- ▼ Vista Engineering Ltd - High Peak
- Vista Engineering Ltd - Glasgow
- BPC Building Products Ltd - Wakefield
- ★ GA Fixings Ltd - Barnsley
- ▲ The Innovation centre - Leven
- ◆ Locusrite Ltd - Maldon



Locusrite Ltd

8A Galliford Road
Causeway Industrial Estate
Maldon
Essex CM9 4XD

01621 843 100

www.locusrite.co.uk

sales@Locusrite.co.uk

Head Office

Vista Engineering Limited
Carr Brook Works
Elmor Lane
Whaley Bridge
High Peak SK23 7JN

01663 736700

www.vistaeng.co.uk

sales@vistaeng.co.uk



Wall Ties

Vista Engineering Ltd



Metalwork

BPC Building Products Ltd



Landscaping

BPC Building Products Ltd



Masonry Support

GA Fixings Ltd



Windposts

GA Fixings Ltd

All illustrations, technical information, descriptions, British and European Standards contained within this publication are intended for guidance only and shall not constitute a "sale by description". All information is provided correct at time of printing (Aug 2026). The Company pursues a policy of constant product development and information contained in this publication is therefore subject to change without notice. All dimensions given are nominal. Updates will not be issued automatically. The information is not intended to have any legal effect, whether by way of advice, representation or warranty (express or implied). We accept no liability whatsoever (to the extent permitted by law) if you place any reliance on this Publication and you must do so at your own risk.

Please contact our head office should you have any technical enquiries.

©Vista Engineering 2026