


PVC-u Beads

PVC-u beads are now being used more and more, particularly in areas of high rainfall or extreme damp conditions. They provide an economical alternative to stainless steel products and are used in the same way as normal galvanised or stainless steel beads. They are manufactured from white high density polyvinylchloride high impact window grade material. Other colours are available and manufactured to order. The face of the bead is ribbed and perforated to produce a good plaster or mortar key and can be easily cut to size using a hacksaw.

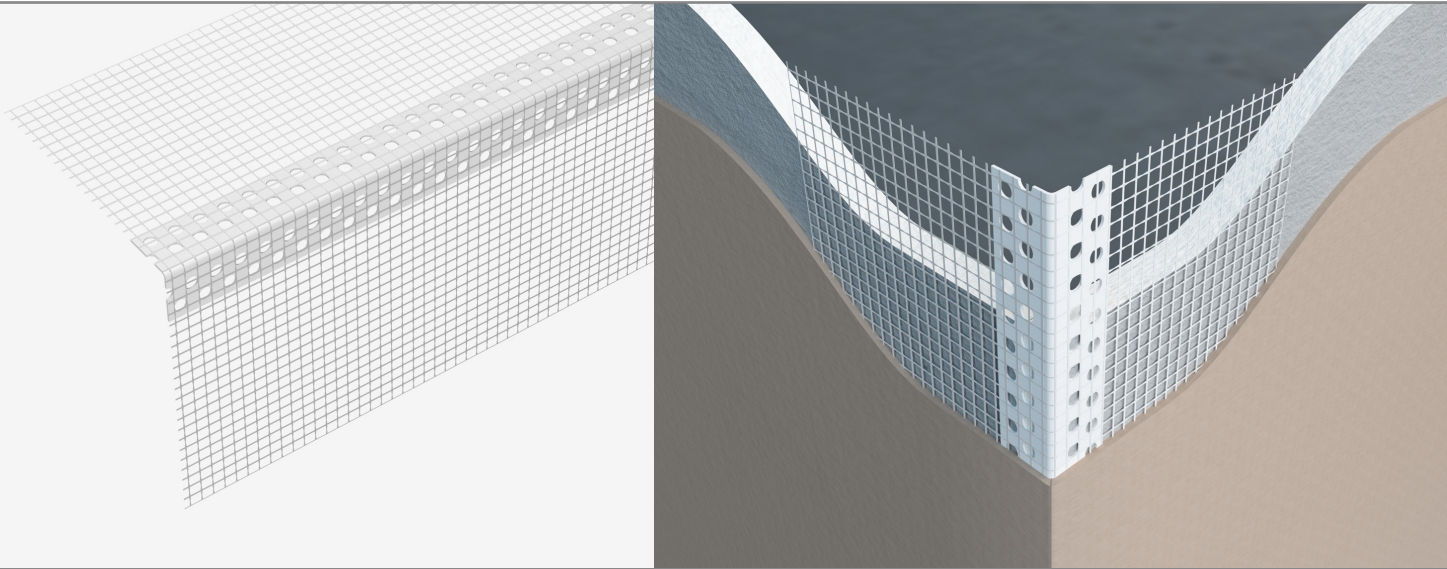

TLPMWAB PVC-u Meshed Wing No-Nose Angle Bead

uPVC Render Corner Bead - No Nose (2.5m) is a 2.5m length bead designed to reinforce 90° angles in building structures, ensuring strength and clean lines around windows, doors, and corners. Its excess mesh enhances durability and helps prevent cracks or damage at stress points, making it essential for all external render applications where sharp, neat edges are required.

Benefits

- Simple installation (with plaster dabs or appropriate fixings)
- Cost effective
- Easy to cut (by use of tin snips or fine tooth saw)
- Non corrosive

Standard: Meets the equivalent standards required for metal bead to BS EN 13658-2:2005

Material: Exterior grade impact resistant UV stable unplasticized PVC-u

Code	Size	Per Box	Weight
TLPMWAB	150mm x 100mm x 2.5m	50 lengths	11kgs
TLPMWAB100/100/50	100mm x 100mm x 2.5m	50 lengths	10kgs
TLPMWAB100100	100mm x 100mm x 2.5m	100 lengths	19kgs

Goods to be stored and transported laying down and in dry conditions.

Please dispose or recycle in accordance with waste management regulations.

COSHH & Health & Safety.

Contains no substances hazardous to health. The comparative rough surface finish and sharp edges requires care when handling manually, to avoid risk of cuts and abrasions gloves should be worn.